

# 斜嘴钳

461/1VDEDP



## 配置文件



## 标准

DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018

## 产品属性


- 材料：特种工具钢
- 落锻，完全淬火与回火
- 切削刃感应淬火
- 头部抛光
- 表面处理：依据ISO 1456:2009进行镀铬处理
- 根据ISO 5749标准和EN IEC 60900生产

## 优势：

- 通过双层涂料绝缘的把手 —— 提供额外安全的双色绝缘保护

## 重要事项！

- 如果第二层显露出来，请立即更换您的VDE工具

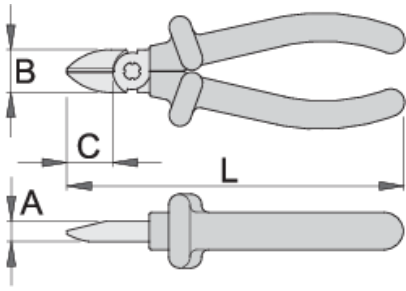

Barcode	L	B	A	C	Weight	Availability
619193	140	19	9.5	18	174	
619194	160	22.5	10	22	224	Till end of stock

cutting capacity (10N=1kg)



Barcode	L	max 1560 N/mm <sup>2</sup> Ø↑	max 750 N/mm <sup>2</sup> Ø↑
619193	140	1,6	2,0
619194	160	1,6	2,5

\* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

### 用途 (pictures)



### Photo (pictures)

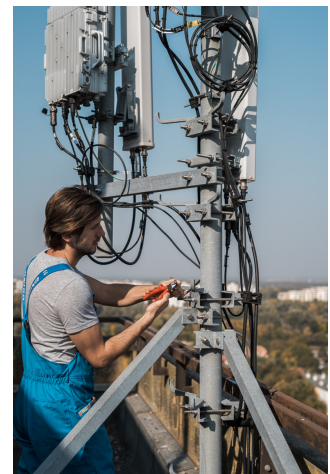

## Frequently asked questions

### **Are certified insulated tools made through a different procedure than non-certified insulated tools?**

The tools are made according to the same procedure.

### **Are insulated (VDE) tools considered as personal protective equipment (PPE)?**

According to EU regulations, VDE tools are not considered as PPE.

### **Is it possible to work with insulated pliers under electrical voltage?**

Yes, but only by professionals who follow safety requirements and use additional personal protective equipment.

### **Are the VDE tools only being sampled in series production?**

The high voltage test (at 10kV) is performed fully on each tool. Other tests are performed in accordance with the EN60900 standard.