

Diagonal-Kraftseitenschneider

466/1VDEDP



Profile



Standards

DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018

Produkteigenschaften


- Material: Premium Flex Plus Kohlenstoffstahl
- geschmiedet und vergütet
- Schneiden induktiv gehärtet
- Kopf poliert
- verchromt nach Standard ISO 1456:2009
- gefertigt laut Standard ISO 5749 und EN IEC 60900

Vorteile:

- Doppelte, zweifarbige Schutzisolierung

Wichtig!

- Wenn die zweite Schutzisolierung erkennbar ist, muss das Werkzeug ersetzt werden

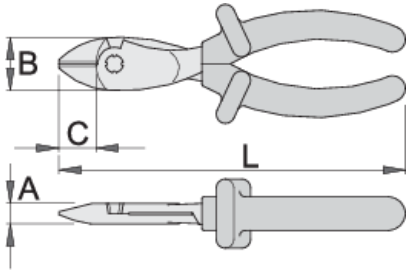

Barcode	L	B	A	C	Weight	Availability
619195	180	28	11	20	303	Till end of stock
619196	200	27	11	21	351	

Schneidwerte (10N=1kg)

Barcode	L	max 2150 N/mm ² Ø↑	max 750 N/mm ² Ø↑
619195	180	1,8	3,0
619196	200	2,0	3,5

* Bilder von Produkten sind Symbolfotos. Abmessungen sind in mm, Gewichte in Gramm.

Häufig gestellte Fragen

Are certified insulated tools made through a different procedure than non-certified insulated tools?

The tools are made according to the same procedure.

Are insulated (VDE) tools considered as personal protective equipment (PPE)?

According to EU regulations, VDE tools are not considered as PPE.

Is it possible to work with insulated pliers under electrical voltage?

Yes, but only by professionals who follow safety requirements and use additional personal protective equipment.

Are the VDE tools only being sampled in series production?

The high voltage test (at 10kV) is performed fully on each tool. Other tests are performed in accordance with the EN60900 standard.