

# Rundzange

476/1VDEDP



## Profile



## Standards

DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018

## Produkteigenschaften


- Material: Premium Plus Kohlenstoffstahl
- geschmiedet und vergütet
- Kopf poliert
- verchromt nach Standard ISO 1456:2009
- gefertigt laut Standard ISO 5745 und EN IEC 60900

## Vorteile:

- Doppelte, zweifarbige Schutzisolierung
- lange Spitzen ermöglichen Arbeiten an schwer erreichbaren Stellen
- geringere Gefahr der Drahtbeschädigung

Wichtig!


- Wenn die zweite Schutzisolierung erkennbar ist, muss das Werkzeug ersetzt werden

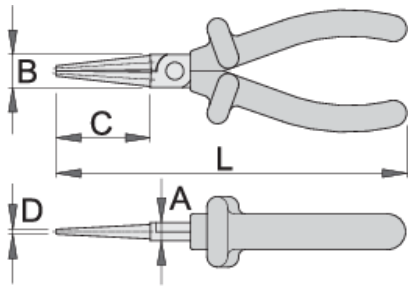

| Barcode | L   | B  | A  | C  | D   | Weight |
|---------|-----|----|----|----|-----|--------|
| 619184  | 140 | 15 | 9  | 39 | 2   | 114    |
| 619185  | 160 | 16 | 10 | 49 | 2.5 | 139    |

\* Bilder von Produkten sind Symbolfotos. Abmessungen sind in mm, Gewichte in Gramm.

## Verwendung (Bilder)



## Häufig gestellte Fragen

### **Are certified insulated tools made through a different procedure than non-certified insulated tools?**

The tools are made according to the same procedure.

### **Are insulated (VDE) tools considered as personal protective equipment (PPE)?**

According to EU regulations, VDE tools are not considered as PPE.

### **Is it possible to work with insulated pliers under electrical voltage?**

Yes, but only by professionals who follow safety requirements and use additional personal protective equipment.

### **Are the VDE tools only being sampled in series production?**

The high voltage test (at 10kV) is performed fully on each tool. Other tests are performed in accordance with the EN60900 standard.