

# Abisolierzange mit Stellschraube und Feder

478/1VDEDP



## Profile



## Standards

DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018

## Produkteigenschaften


- Material: Premium Plus Kohlenstoffstahl
- geschmiedet und vergütet
- Schneiden induktiv gehärtet
- Kopf poliert
- Abisolierbereich 0,6 mm<sup>2</sup> - 10 mm<sup>2</sup>
- gefertigt laut Standard EN IEC 60900

## Vorteile:

- Doppelte, zweifarbige Schutzisolierung
- mit Feder

## Wichtig!


- Wenn die zweite Schutzisolierung erkennbar ist, muss das Werkzeug ersetzt werden

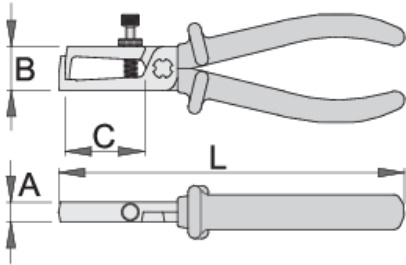

	L		B	A	C	
619186	160	0.6 - 10	18	9	40	167

\* Bilder von Produkten sind Symbolfotos. Abmessungen sind in mm, Gewichte in Gramm.

## Verwendung (Bilder)



## Häufig gestellte Fragen

### **Are certified insulated tools made through a different procedure than non-certified insulated tools?**

The tools are made according to the same procedure.

### **Are insulated (VDE) tools considered as personal protective equipment (PPE)?**

According to EU regulations, VDE tools are not considered as PPE.

### **Is it possible to work with insulated pliers under electrical voltage?**

Yes, but only by professionals who follow safety requirements and use additional personal protective equipment.

### **Are the VDE tools only being sampled in series production?**

The high voltage test (at 10kV) is performed fully on each tool. Other tests are performed in accordance with the EN60900 standard.