

直尖嘴钳，带剪切和夹管功能

508/1VDEDP



配置文件



标准

DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018

产品属性

- 材料：特种工具钢
- 落锻，完全淬火与回火
- 切削刃感应淬火
- 头部抛光
- 表面处理：依据ISO 1456:2009进行镀铬处理
- 根据ISO 5745标准和EN IEC 60900生产


优势：

- 通过双层涂料绝缘的把手 —— 提供额外安全的双色绝缘保护
- 也可用于夹持和分离电缆或其他精细表面的物体

- 锯齿状钳口

重要事项！

- 如果第二层显露出来，请立即更换您的VDE工具

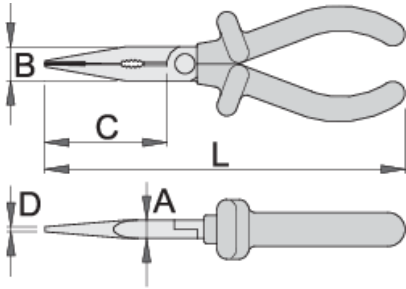

Barcode	L	B	D	A	C	Weight	Availability
619189	170	17	2.5	9	61	162	
619190	200	17	2.5	9	77	201	Till end of stock

cutting capacity (10N=1kg)

Barcode	L	max 1560 N/mm ² Ø↑	max 750 N/mm ² Ø↑
619189	170	1,6	2,0
619190	200	1,8	2,5

* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

Frequently asked questions

Are certified insulated tools made through a different procedure than non-certified insulated tools?

The tools are made according to the same procedure.

Are insulated (VDE) tools considered as personal protective equipment (PPE)?

According to EU regulations, VDE tools are not considered as PPE.

Is it possible to work with insulated pliers under electrical voltage?

Yes, but only by professionals who follow safety requirements and use additional personal protective equipment.

Are the VDE tools only being sampled in series production?

The high voltage test (at 10kV) is performed fully on each tool. Other tests are performed in accordance with the EN60900 standard.