

Kliješta mehaničarska, ravna

508/1VDEDP



Profili



Zatvori pretraživanje

DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018

Atributi proizvoda

- materijal: Premium Plus ugljični čelik
- kovana, potpuno poboljšana i ojačana
- rezni rubovi induktivno kaljeni
- čeljusti polirane
- završna obrada: kromiranje po standardu ISO 1456:2009
- izrađeno po standardu ISO5745 i EN IEC 60900


Prednosti:

- ručke izolirane sa dva izolacijska sloja u dvije boje, koje omogućavaju dodatnu sigurnost
- koriste se i za stiskanje i odvajanje od kablova i drugih osjetljivih dijelova

- nazubljena stezna površina

Važno!

- ukoliko drugi sloj postane vidljiv, alat zamijenite novim.

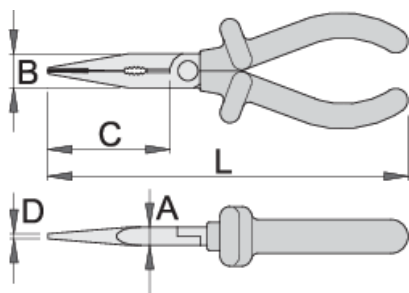

Barcode	L	B	D	A	C	Icon
619189	170	17	2.5	9	61	162
619190	200	17	2.5	9	77	201

sposobnost rezanja (10N=1kg)

Barcode	L	max 1600 N/mm ² Ø↑	max 650 N/mm ² Ø↑
619189	170	1,6	2,0
619190	200	1,8	2,5

* Slike proizvoda su simbolične. Sve dimenzije su u mm, masa je u g.

Frequently asked questions

Are certified insulated tools made through a different procedure than non-certified insulated tools?

The tools are made according to the same procedure.

Are insulated (VDE) tools considered as personal protective equipment (PPE)?

According to EU regulations, VDE tools are not considered as PPE.

Is it possible to work with insulated pliers under electrical voltage?

Yes, but only by professionals who follow safety requirements and use additional personal protective equipment.

Are the VDE tools only being sampled in series production?

The high voltage test (at 10kV) is performed fully on each tool. Other tests are performed in accordance with the EN60900 standard.