

Kliješta mehaničarska, kosa

512/1VDEDP



Profili



Atributi proizvoda


- materijal: poseban alatni čelik
- kovana, potpuno poboljšana i ojačana
- rezni rubovi induktivno kaljeni
- čeljusti polirane
- završna obrada: kromiranje po standardu ISO 1456:2009
- izrađeno po standardu ISO5745 i EN IEC 60900

Prednosti:

- ručke izolirane sa dva izolacijska sloja u dvije boje, koje omogućavaju dodatnu sigurnost
- duge, savijene čeljusti omogućuju jednostavan i precizan prihvat matica i vijaka
- robusne čeljusti kliješta omogućuju dobar prihvat
- čeljusti zakrivljene pod kutem od 45°
- nazubljena stezna površina

Važno!

- ukoliko drugi sloj postane vidljiv, alat zamijenite novim.

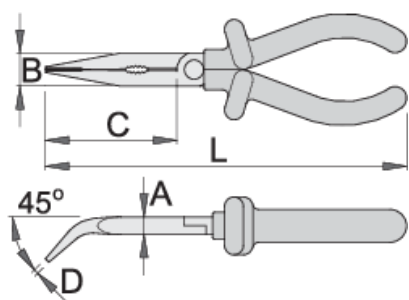


Barcode	L	B	D	A	C	Weight	Availability
619191	170	17	2.5	9	61	156	
619192	200	17	2.5	9	77	201	Till end of stock

sposobnost rezanja (10N=1kg)

Barcode	L	max 1560 N/mm ² Ø↑	max 750 N/mm ² Ø↑
619191	170	1,6	2,0
619192	200	1,8	2,5

* Slike proizvoda su simbolične. Sve dimenzije su u mm, masa je u g.

Upotreba (pictures)



Frequently asked questions

Are certified insulated tools made through a different procedure than non-certified insulated tools?

The tools are made according to the same procedure.

Are insulated (VDE) tools considered as personal protective equipment (PPE)?

According to EU regulations, VDE tools are not considered as PPE.

Is it possible to work with insulated pliers under electrical voltage?

Yes, but only by professionals who follow safety requirements and use additional personal protective equipment.

Are the VDE tools only being sampled in series production?

The high voltage test (at 10kV) is performed fully on each tool. Other tests are performed in accordance with the EN60900 standard.