

Ključ nasadni izolirani, dugi, prihvat 1/2"

190/2LVDEDP



Profili



Zatvori pretraživanje

DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018

Atributi proizvoda

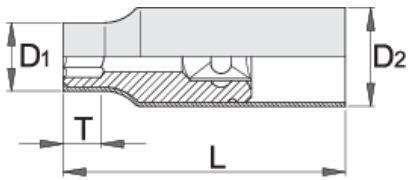
- materijal: Premium Flex krom-vanadij
- kovan, u cijelosti ojačan i zakaljen
- glava: kromirana (ISO 1456:2009)
- izrađeni prema standardu DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018





Prednosti:

- obloženi dvostrukim izolacijskim slojem sa dvije boje, koje omogućuju dodatnu sigurnost
- kontrola prema standardu EN IEC 60900

Važno!

- ukoliko drugi sloj postane vidljiv, alat zamijenite novim.



		L	D1	D2	T		
619104	10	96	20.7	27	27	116	Till end of stock
619105	11	96	21.6	27	27	116	Till end of stock
619106	12	96	22.6	27	27	123	Till end of stock
619107	13	96	23.3	27	27	127	Till end of stock
619108	14	96	25.8	27	35	134	Till end of stock
619111	17	96	30	27	35	151	Till end of stock
619113	19	96	32	27	35	170	Till end of stock
619115	21	96	33	27	35	188	Till end of stock
621604	22	96	33.6	29.6	35	213	Till end of stock
621605	24	96	35.6	31.6	35	238	Till end of stock

* Slike proizvoda su simbolične. Sve dimenzije su u mm, masa je u g.

Frequently asked questions

Can an insulated socket wrench be used with a normal ratchet?

A non-insulated socket wrench cannot be used with a normal ratchet because it has additional protection in the connection area.