

# Bussola isolata 1/2", tipo lungo

190/2LVDEDP



## Profili



## Standard

DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018

## Attributi del prodotto

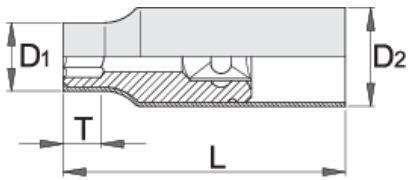
- materiale: acciaio al cromo vanadio flex premium
- forgiata, interamente bonificata
- testa: cromata ISO 1456:2009
- conforme allo standard DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018





## Vantaggi:

- isolamento a doppio strato - doppio colore - per una doppia sicurezza
- controllo 100% - ogni pezzo è testato con test elettrico

## Importante!

- se è visibile il secondo strato, sostituite il vostro attrezzo VDE con uno nuovo



		L	D1	D2	T		
619104	10	96	20.7	27	27	116	Till end of stock
619105	11	96	21.6	27	27	116	Till end of stock
619106	12	96	22.6	27	27	123	Till end of stock
619107	13	96	23.3	27	27	127	Till end of stock
619108	14	96	25.8	27	35	134	Till end of stock
619111	17	96	30	27	35	151	Till end of stock
619113	19	96	32	27	35	170	Till end of stock
619115	21	96	33	27	35	188	Till end of stock
621604	22	96	33.6	29.6	35	213	Till end of stock
621605	24	96	35.6	31.6	35	238	Till end of stock

\* Le immagini dei prodotti sono puramente simboliche. Tutte le dimensioni sono in mm, peso in grammi.

## Frequently asked questions

### Can an insulated socket wrench be used with a normal ratchet?

A non-insulated socket wrench cannot be used with a normal ratchet because it has additional protection in the connection area.