

Insulated socket 1/2", long type, 12 point

190/2LVDEDP



프로파일



표준

DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018

제품 특징

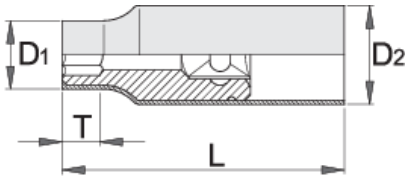
- 재질: 프리미엄 플렉스 크롬 바나듐 스틸
- drop forged, entirely hardened and tempered
- head: trivalent chrome plated according to ISO 1456:2009
- made according to standard ISO 2725-1 and EN IEC 60900:2018




장점:

- double layered - double coloured insulation for additional safety
- controlled according to standard EN IEC 60900

Important!

- if second layer is visible, replace your insulated tool with a new one.



|  |  | L | D1 | D2 | T |  |
|--|---|----|------|------|----|---|
| 619104 | 10 | 96 | 20.7 | 27 | 27 | 116 |
| 619105 | 11 | 96 | 21.6 | 27 | 27 | 116 |
| 619106 | 12 | 96 | 22.6 | 27 | 27 | 123 |
| 619107 | 13 | 96 | 23.3 | 27 | 27 | 127 |
| 619108 | 14 | 96 | 25.8 | 27 | 35 | 134 |
| 619111 | 17 | 96 | 30 | 27 | 35 | 151 |
| 619113 | 19 | 96 | 32 | 27 | 35 | 170 |
| 619115 | 21 | 96 | 33 | 27 | 35 | 188 |
| 621604 | 22 | 96 | 33.6 | 29.6 | 35 | 213 |
| 621605 | 24 | 96 | 35.6 | 31.6 | 35 | 238 |

* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

자주 묻는 질문

절연 소켓 렌치를 일반 라쳇과 함께 사용할 수 있습니까?

비절연 소켓 렌치는 연결 부위에 추가 보호 장치가 있기 때문에 일반 라쳇과 함께 사용할 수 없습니다.