

# 双高颈套筒扳手

176




## 配置文件





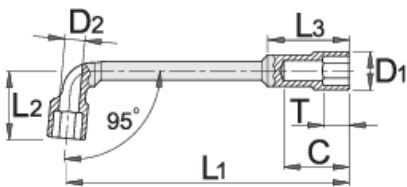

## 产品属性

- 材料：铬钒钢
- 落锻，完全淬火与回火
- 表面处理：根据ISO 1456:2009标准镀铬




Barcode	mm	L1	L2	C	D1	T	L3	D2	Icon	Icon
609102	6	104,5	22	22	11	7	29	5	44	Till end of stock
609103	7	108	25	23	12	8	30,5	5	47	
609104	8	113	26	27	13	10	30	6,5	76	
609105	9	118	27	29	14,5	10	33	7	78	
609106	10	123	31	32	16	11	35	7,5	123	

			L1	L2	C	D1	T	L3	D2		
609107		11	128,5	32	31	17	12	37	7,5	125	
609108		12	135	33	34	18	12	40	8,5	161	
609109		13	143	36,5	40	19	14	47	9	186	
609110		14	149,5	40	41	21	14	48	10,5	226	Till end of stock
609111		15	163	41,5	43	22,5	15	50	11	236	Till end of stock
609112		16	173	46,5	47	24	17	54	13	340	
609113		17	184,5	46,5	49	25	18	56	13	360	
609114		18	198	49	51,5	26,5	19,5	58	13	411	
609115		19	204	52	52,5	28	20,5	62	14	445	
609116		20	207	53,5	54,5	30	21,5	63	14	495	Till end of stock
609117		21	216	57	57,5	30,5	23,5	65	15	487	Till end of stock
609118		22	231	57	58	32	23,5	67	16	590	
609119		23	238	62	64,5	33,5	24,5	74	18	640	
609120		24	249	64,5	68,5	34	25,5	77	18	713	
609121		25	260	67	69,5	36	25,5	79	19,5	703	Till end of stock
609122		26	270,5	68	70	36	27	81	22	876	Till end of stock
609123		27	280	68	71	37	25,5	80	20	867	
609124		28	290,5	70	73,5	38,5	27,5	84	21	1045	
609125		29	298,5	72	78,5	41	28,5	90	22	1140	
609126		30	311	75	80,5	42	28,5	93	23	1257	
609127		32	330,5	79	82,5	45	28,5	95	24	1434	
609128		35	340	90	97,5	48	35,5	108	25	2200	Till end of stock
609129		36	376	80	86	50	30	100	25	2235	

\* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

用途 (pictures)



扳手的形状和开口使其可以在长螺纹上拧动螺母



通过其较深的纵剖面，此扳手也可通过长螺母和螺纹，作为套筒扳手使用。

## Photo (pictures)

