

# 双高颈套筒扳手

176




## 配置文件





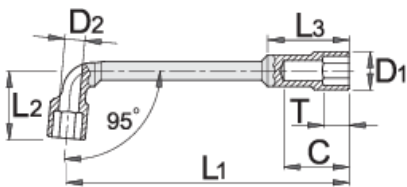

## 产品属性

- 材料：铬钒钢
- 落锻，完全淬火与回火
- 表面处理：根据ISO 1456:2009标准镀铬




Barcode	mm	L1	L2	C	D1	T	L3	D2	Weight	Time
609103	7	108	25	23	12	8	30,5	5	47	
609104	8	113	26	27	13	10	30	6,5	76	
609105	9	118	27	29	14,5	10	33	7	78	
609106	10	123	31	32	16	11	35	7,5	123	
609107	11	128,5	32	31	17	12	37	7,5	125	


			L1	L2	C	D1	T	L3	D2		
609108		12	135	33	34	18	12	40	8,5	161	
609112		16	173	46,5	47	24	17	54	13	340	
609113		17	184,5	46,5	49	25	18	56	13	360	
609114		18	198	49	51,5	26,5	19,5	58	13	411	
609115		19	204	52	52,5	28	20,5	62	14	445	
609118		22	231	57	58	32	23,5	67	16	590	
609120		24	249	64,5	68,5	34	25,5	77	18	713	
609123		27	280	68	71	37	25,5	80	20	867	
609126		30	311	75	80,5	42	28,5	93	23	1257	
609127		32	330,5	79	82,5	45	28,5	95	24	1434	
609129		36	376	80	86	50	30	100	25	2235	

\* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

## 用途 (pictures)



扳手的形状和开口使其可以在长螺纹上拧动螺母



通过其较深的纵剖面，此扳手也可通过长螺母和螺纹，作为套筒扳手使用。

## Photo (pictures)

