

钢丝钳

406/4G



配置文件







标准

ISO 5746


产品属性

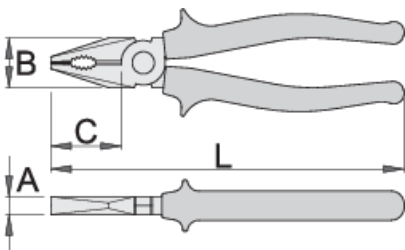- 材料：特种工具钢
- 落锻，完全淬火与回火
- 切削刃感应淬火
- 头表面处理：细磨
- 表面处理：根据ISO 9717标准进行磷酸盐处理
- 重型塑料把手
- 根据ISO 5746标准生产




	L	B	C	A		
608673	140	23	32	8	157	Till end of stock
608674	160	24	35	9.5	224	
608675	180	27	38	10	274	
608676	200	29	41	10.5	341	
608677	220	32	47	11	421	

cutting capacity (10N=1kg)

	L	max 1560 N/mm ² Ø↑	max 750 N/mm ² Ø↑
608673	140	1,6	2,0
608674	160	1,6	2,0
608675	180	1,8	2,5
608676	200	2,0	2,5
608677	220	2,0	3,0

* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

用途 (pictures)

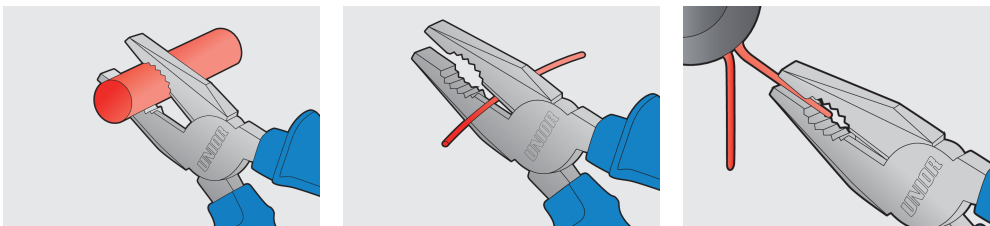

Frequently asked questions

The head profile on the screw has deformed to such an extent that it cannot be unscrewed with a screwdriver. Which Unior tool can be used in this case?

407/4DP screw pliers are the best choice for unscrewing screws with a damaged head profile.