

# Kliješta kombinirana

406/4G



## Profili







## Zatvori pretraživanje

ISO 5746


## Atributi proizvoda

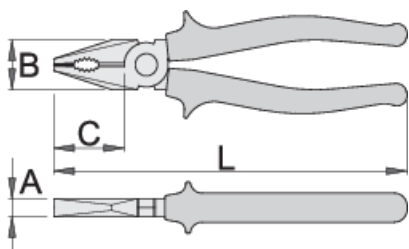- materijal: Premium Plus ugljični čelik
- kovana, potpuno poboljšana i ojačana
- rezni rubovi induktivno kaljeni
- završna obrada čeljusti: fino brušenje
- završna obrada: fosfatiranje po standardu DIN12476
- robusne ručke obložene plastičnim navlakama
- izrađena prema standardu ISO 5746




	L	B	C	A		
608673	140	23	32	8	157	Till end of stock
608674	160	24	35	9.5	224	
608675	180	27	38	10	274	
608676	200	29	41	10.5	341	
608677	220	32	47	11	421	

sposobnost rezanja (10N=1kg)

	L	max 1560 N/mm <sup>2</sup> Ø↑	max 750 N/mm <sup>2</sup> Ø↑
608673	140	1,6	2,0
608674	160	1,6	2,0
608675	180	1,8	2,5
608676	200	2,0	2,5
608677	220	2,0	3,0

\* Slike proizvoda su simbolične. Sve dimenzije su u mm, masa je u g.

upotreba (pictures)

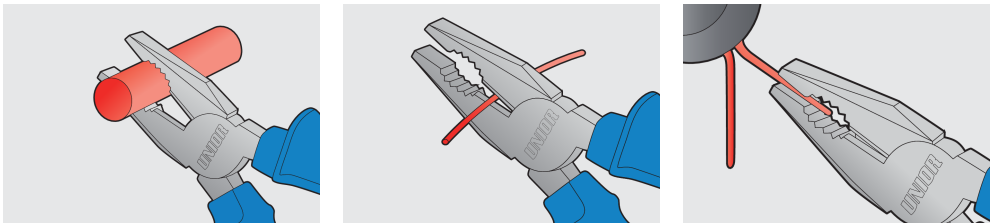

## Frequently asked questions

**The head profile on the screw has deformed to such an extent that it cannot be unscrewed with a screwdriver. Which Unior tool can be used in this case?**

407/4DP screw pliers are the best choice for unscrewing screws with a damaged head profile.