


# Klešta kombinovana

406/4G



## Usage

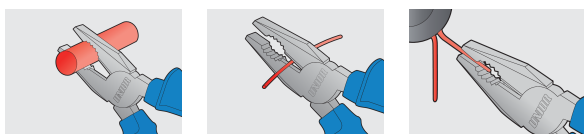

## Profiles




## Opis proizvoda

- materijal: premium plus alatni čelik
- kovana, potpuno poboljšana i ojačana
- rezne ivice induktivno kaljene
- čeljusti fino brušene
- površina fosfatirana ISO 9717
- Robusne ručke obložene plastičnim navlakama
- izrađena prema standardu ISO 5746

## Standards

DIN ISO 5746

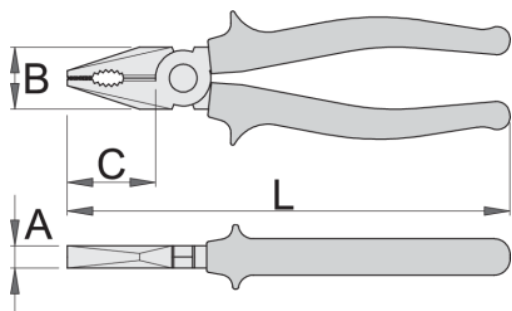



L


B

C



A

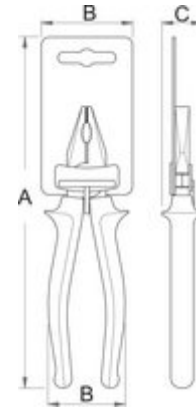


	L	B	C	A	
608673	140	23	32	8	157
608674	160	24	35	9.5	224
608675	180	27	38	10	274
608676	200	29	41	10.5	341
608677	220	32	47	11	421






### Retail packaging

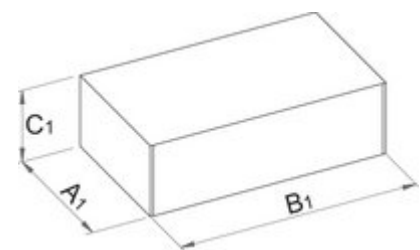	MA	MB	MC	
608673	210	58	30	150
608674	225	58	31	222
608675	240	59	31	270
608676	250	61	31	337
608677	310	65	33	430



### Transport packaging

		TA	TB	TC	
608673	4	75	308	60	665
608674	4	75	308	60	956
608675	4	84	318	63	1154
608676	4	85	337	73	1439
608677	4	145	358	48	1845