

# Dana anësore për zhveshje

462/1BI



## Profiles




## Product features

- Materiali: çeliku të veçantë mjet
- prerja buzë induksion thekur
- kreu i lëmuar
- përfundojë sipërfaqe: krom kromuar për ISO 1456:2009 standarde
- të rënda në detyrë të dyfishtë - komponent trajton

## Avantazhet:

- Nxjerrje jashtë izolimin e përçuesve të vetme 1,5 mm<sup>2</sup> dhe 2,5mm<sup>2</sup>

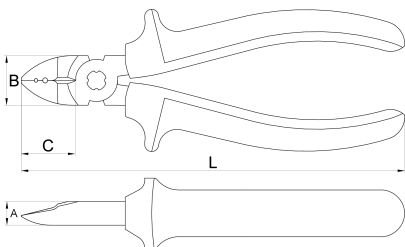

L

B

A

C





L

B

A

C



624059

160

21

10

22

211

Kapaciteti i prerjes



L

max 1600 N/mm<sup>2</sup> Ø↑max 650 N/mm<sup>2</sup> Ø↑

624059

160

1,6

2,5

\* Imazhet e produkteve janë simbolike. Të gjitha dimensionet janë në mm, pesha në gram. Të gjitha dimensionet e listuara mund të ndryshojnë në tolerancë.

## Frequently asked questions

### **What does it mean that the pliers are quenched and tempered and the head parts/teeth of the pliers are inductively hardened?**

It means that the pliers are thermally processed by quenching and tempering their entire surface to a hardness of about 45HRc, while head parts are additionally inductively hardened to a hardness of at least 60HRc.

### **What is meant by the statement that pliers are made in accordance with the stated ISO standard?**

It means that the pliers are in accordance with the international standard in terms of dimensions, strength and structure, and compliance is determined by prescribed tests.