

# Sečice kose, višenamjenske

462/1BI



## Profili




## Atributi proizvoda

- materijal: Premium plus alatni čelik
- rezni rubovi induktivno kaljeni
- čeljusti polirane
- završna obrada: kromiranje po standardu ISO 1456:2009
- robusne ručke izolirane dvokomponentnim navlakama

## Prednosti:

- **skidanje izolacije električnih kablova 1,5 mm<sup>2</sup> i 2,5mm<sup>2</sup>**

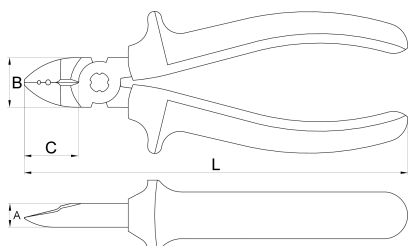

L

B

A

C





624059

L

160

B

21

A

10

C

22



211

kapacitet sečenja (10N=1kg)



624059

L

160

max 1600 N/mm<sup>2</sup> Ø↑

1,6

max 650 N/mm<sup>2</sup> Ø↑

2,5

\* Slike proizvoda su simbolične. Sve dimenzije su u mm, masa je u g.

## Frequently asked questions

### **What does it mean that the pliers are quenched and tempered and the head parts/teeth of the pliers are inductively hardened?**

It means that the pliers are thermally processed by quenching and tempering their entire surface to a hardness of about 45HRc, while head parts are additionally inductively hardened to a hardness of at least 60HRc.

### **What is meant by the statement that pliers are made in accordance with the stated ISO standard?**

It means that the pliers are in accordance with the international standard in terms of dimensions, strength and structure, and compliance is determined by prescribed tests.