

Sečice kose, višenamjenske

462/1BI



Profilii




Atributi proizvoda

- materijal: Premium plus alatni čelik
- rezni rubovi induktivno kaljeni
- čeljusti polirane
- završna obrada: kromiranje po standardu ISO 1456:2009
- robustne ručke izolirane dvokomponentnim navlakama

Prednosti:

- skidanje izolacije električnih kablova 1,5 mm² i 2,5mm²**

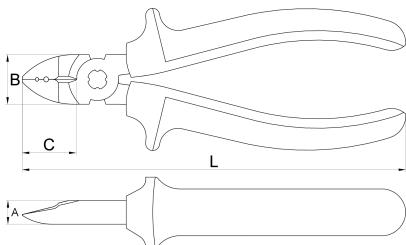

L

B

A

C





L

B

A

C



624059

160

21

10

22

211

kapacitet sečenja (10N=1kg)

	L	max 1560 N/mm ² Ø↑	max 750 N/mm ² Ø↑
--	---	-------------------------------	------------------------------

624059

160

1,6

2,5

* Slike proizvoda su simbolične. Sve dimenzije su u mm, masa je u g.

Frequently asked questions

What does it mean that the pliers are quenched and tempered and the head parts/teeth of the pliers are inductively hardened?

It means that the pliers are thermally processed by quenching and tempering their entire surface to a hardness of about 45HRc, while head parts are additionally inductively hardened to a hardness of at least 60HRc.

What is meant by the statement that pliers are made in accordance with the stated ISO standard?

It means that the pliers are in accordance with the international standard in terms of dimensions, strength and structure, and compliance is determined by prescribed tests.