

# Alicates de corte diagonal multifuncionales

462/1BI



## Perfiles




## Características del producto

- Material: composición especial para temple y endurecimiento
- filos templados por inducción
- cabezas pulidas
- acabado: cromado según ISO 1456:2009
- mangos en doble componente para trabajos duros

## Ventajas:

- **Odizolování vodičů 1,5 mm<sup>2</sup> a 2,5 mm<sup>2</sup>**

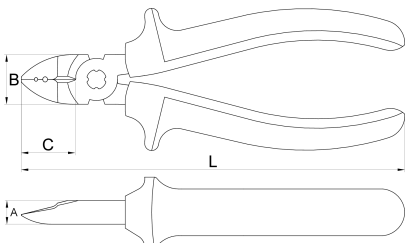



L

B

A

C



624059

160

21

10

22

211

## Capacidad de corte



L

max 1600 N/mm<sup>2</sup> Ø↑max 650 N/mm<sup>2</sup> Ø↑

624059

160

1,6

2,5

\* Las imágenes de los productos son simbólicas. Todas las dimensiones son en mm, peso en gramos.

## Preguntas frecuentes

### **What does it mean that the pliers are quenched and tempered and the head parts/teeth of the pliers are inductively hardened?**

It means that the pliers are thermally processed by quenching and tempering their entire surface to a hardness of about 45HRc, while head parts are additionally inductively hardened to a hardness of at least 60HRc.

### **What is meant by the statement that pliers are made in accordance with the stated ISO standard?**

It means that the pliers are in accordance with the international standard in terms of dimensions, strength and structure, and compliance is determined by prescribed tests.