

# Multifunktions-Diagonalseitenschneider

462/1BI



## Profile




## Produkteigenschaften

- Material: Premium Plus Kohlenstoffstahl
- Schneiden induktiv gehärtet
- Kopf poliert
- verchromt gemäß EN12540
- Zweikomponentengriffe mit Abgleitschutz

## Vorteile:

- **Abziehen von Kabelisolierungen mit 1,5mm<sup>2</sup> und 2,5mm<sup>2</sup>**

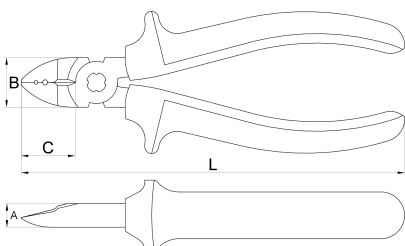

L

B

A

C





624059

L

160

B

21

A

10

C

22



211

Schneidwerte (10N=1kg)



624059

L

160

max 1560 N/mm<sup>2</sup> Ø↑

1,6

max 750 N/mm<sup>2</sup> Ø↑

2,5

\* Bilder von Produkten sind Symbolfotos. Abmessungen sind in mm, Gewichte in Gramm.

## Häufig gestellte Fragen

### **What does it mean that the pliers are quenched and tempered and the head parts/teeth of the pliers are inductively hardened?**

It means that the pliers are thermally processed by quenching and tempering their entire surface to a hardness of about 45HRc, while head parts are additionally inductively hardened to a hardness of at least 60HRc.

### **What is meant by the statement that pliers are made in accordance with the stated ISO standard?**

It means that the pliers are in accordance with the international standard in terms of dimensions, strength and structure, and compliance is determined by prescribed tests.