

Multifunctionele zijsnijtang

462/1BI



Profielen




Product attributen

- materiaal: premium plus carbonstaal
- cutting edges induction hardened
- kop gepolijst
- surface finish: chrome plated to standard ISO 1456:2009
- heavy duty double - component handles

Voordelen:

- **Strippen van isolatie van enkele geleiders 1,5mm² en 2,5mm²**

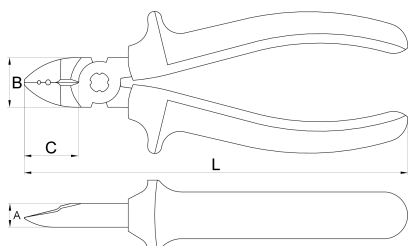

L

B


A

C



	L	B	A	C	
624059	160	21	10	22	211

knipcapaciteit

	L	max 1600 N/mm ² Ø↑	max 650 N/mm ² Ø↑
624059	160	1,6	2,5

* Afbeeldingen van producten zijn symbolisch. Alle afmetingen zijn in mm en gewicht in gram. Alle vermelde afmetingen kunnen variëren in tolerantie.

Veelgestelde vragen

What does it mean that the pliers are quenched and tempered and the head parts/teeth of the pliers are inductively hardened?

It means that the pliers are thermally processed by quenching and tempering their entire surface to a hardness of about 45HRc, while head parts are additionally inductively hardened to a hardness of at least 60HRc.

What is meant by the statement that pliers are made in accordance with the stated ISO standard?

It means that the pliers are in accordance with the international standard in terms of dimensions, strength and structure, and compliance is determined by prescribed tests.