

# Çok fonksiyonlu yan keski

462/1BI



## Profiles




## Product features

- malzeme: özel alet çeliği
- kesici ağızlı endüksiyonla sertleştirilmiş
- başlık cilalıdır
- yüzey bitirme: ISO 1456:2009 standardına göre krom kaplamalı
- ağır hizmet tipi iki bileşenli saplar

## Avantajları:

- **Tek iletken izoleli kablo soyma 1,5 mm<sup>2</sup> and 2,5mm<sup>2</sup>**

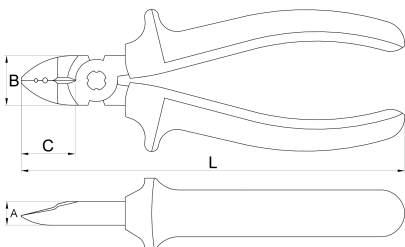



L

B


A

C



|  | L   | B  | A  | C  |  |
|---|-----|----|----|----|--|
| 624059  | 160 | 21 | 10 | 22 | 211  |

cutting capacity

|  | L   | max 1560 N/mm <sup>2</sup> Ø↑ | max 750 N/mm <sup>2</sup> Ø↑ |
|--|-----|-------------------------------|------------------------------|
| 624059   | 160 | 1,6                           | 2,5                          |

\* Ürünlerin resimleri semboliktir. Bütün boyutlar mm ve ağırlık gram cinsindendir.

## Frequently asked questions

**What does it mean that the pliers are quenched and tempered and the head parts/teeth of the pliers are inductively hardened?**  
 It means that the pliers are thermally processed by quenching and tempering their entire surface to a hardness of about 45HRc, while head parts are additionally inductively hardened to a hardness of at least 60HRc.

**What is meant by the statement that pliers are made in accordance with the stated ISO standard?**  
 It means that the pliers are in accordance with the international standard in terms of dimensions, strength and structure, and compliance is determined by prescribed tests.