

VDE TBI 绝缘细长电工螺丝刀

604VDE TBI



配置文件



标准


DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018



产品属性

- 螺丝刀：切割器 - 特种工具钢、锻造、完全淬火与回火，完全淬火与回火
- 黑色刀头
- 手柄：符合人体工程学的形状
- 三种成分组成的材料
- 挂孔
- 根据DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018标准生产

优势：

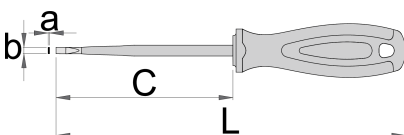- 带细长刀片的型号
- 尽管螺丝刀形状细长，其作为正常绝缘螺丝刀时，功能和安全性与普通螺丝刀一致。
- 细长的刀片可以对难以触及的位置进行作业




	axb	C	L	
624063	0.6 x 3.5	100	185	37
624064	0.8 x 4.0	100	185	39
624065	1.0 x 5.5	125	225	74

* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.


用途 (pictures)



人体工程手柄设计 = 保护
手部



较大的手部接触面积 = 更
大的转矩功率



Safety tips



- Use a screw holding screwdriver to get screws started in awkward, hard-to-reach areas.
- Use a stubby screwdriver in close quarters where a conventional screwdriver cannot be used.
- A rounded tip should be redressed with a file; make sure edges are straight.
- Screwdrivers used in the shop are best stored in a rack. This way, the proper selection of the right screwdriver can be quickly made.
- Keep the screwdriver handle clean; a greasy handle is apt to cause accidents.
- A screwdriver should never be used as pry bar. If it is overstressed in this manner, the blade



- Don't use pliers on the handle of a screwdriver to get extra turning power. A wrench should only be used on the square shank or bolster of a screwdriver that is especially designed for that purpose.
- Don't expose a screwdriver blade to excessive heat as it may reduce the hardness of the blade.
- Don't use a screwdriver with a split or broken handle.
- Don't use a regular screwdriver to check a storage battery or to determine if an electrical circuit is live.
- Don't use tools that shows sign of wear and have the second layer of plastic visible.

might break and send a particle of steel into the operator's arm or even towards his eyes.

- VDE tools that have several parts, have to be assembled correctly before use.
- When working with VDE tools avoid contact with water.