

VDE elektricien schroevendraaier, TBI SLIM sleuf

604VDEETBI



Profielen



Standaard


DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018



Product attributen

- lemmet: Chrome-vanadium-molybdenum staal, volledig gehard en getemperd
- zwarte tip
- handvat: ergonomische vorm
- drie componenten materiaal
- met gaatje om op te hangen
- gemaakt volgens norm DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018

Voordelen:



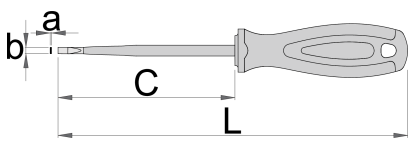
- model met smal lemmet
- Hoewel deze schroevendraaier een smal lemmet heeft, heeft deze dezelfde functionaliteit en veiligheid als een normaal geïsoleerde schroevendraaier.
- smal lemmet maakt het mogelijk te werken op moeilijke bereikbare plaatsen



|  | axb | c | L |  |
|--|-----------|-----|-----|---|
| 624063 | 0.6 x 3.5 | 100 | 185 | 37 |
| 624064 | 0.8 x 4.0 | 100 | 185 | 39 |
| 624065 | 1.0 x 5.5 | 125 | 225 | 74 |

* Afbeeldingen van producten zijn symbolisch. Alle afmetingen zijn in mm en gewicht in gram. Alle vermelde afmetingen kunnen variëren in tolerantie.

Gebruik (Afbeeldingen)

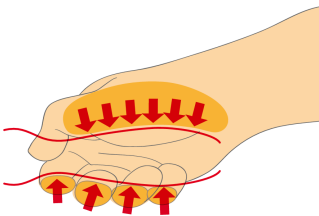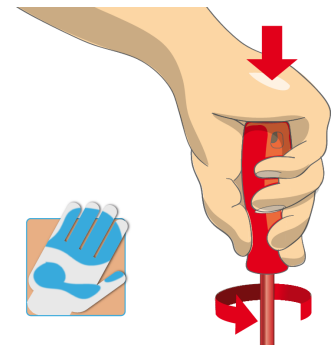

Veiligheidstips



- Use a screw holding screwdriver to get screws started in awkward, hard-to-reach areas.
- Use a stubby screwdriver in close quarters where a conventional screwdriver cannot be used.
- A rounded tip should be redressed with a file; make sure edges are straight.
- Screwdrivers used in the shop are best stored in a rack. This way, the proper selection of the right screwdriver can be quickly made.



- Don't use pliers on the handle of a screwdriver to get extra turning power. A wrench should only be used on the square shank or bolster of a screwdriver that is especially designed for that purpose.
- Don't expose a screwdriver blade to excessive heat as it may reduce the hardness of the blade.
- Don't use a screwdriver with a split or broken handle.
- Don't use a regular screwdriver to check a storage battery or to determine if an electrical

- Keep the screwdriver handle clean; a greasy handle is apt to cause accidents.
- A screwdriver should never be used as pry bar. If it is overstressed in this manner, the blade might break and send a particle of steel into the operator's arm or even towards his eyes.
- VDE tools that have several parts, have to be assembled correctly before use.
- When working with VDE tools avoid contact with water.

circuit is live.

- Don't use tools that shows sign of wear and have the second layer of plastic visible.