

Telefoontang met snijkanten

506/4G



Profielen




Standaard

DIN ISO 5745

Product attributen

- materiaal: premium plus carbonstaal
- drop forged, entirely hardened and tempered
- cutting edges induction hardened
- head surface finish: finely ground
- surface finish: phosphated to standard ISO 9717
- heavy duty plastic handles
- gripping surface serrated
- made according to standard ISO 5745
- ook voor het klemmen en scheiden van kabels en andere kwetsbare items

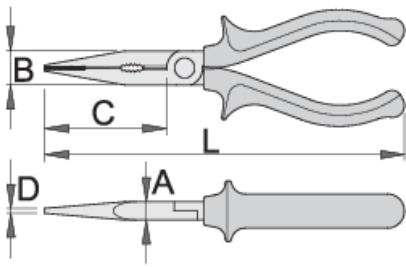

Barcode	L	B	D	A	C	Weight
608712	140	15	2	8	39	115
608713	160	16	2.5	9	49	137

knipcapaciteit (10N=1kg)

Barcode	L	max 1600 N/mm ² Ø↑	max 650 N/mm ² Ø↑
608712	140	1,6	2,0
608713	160	1,6	2,0

* Afbeeldingen van producten zijn symbolisch. Alle afmetingen zijn in mm en gewicht in gram. Alle vermelde afmetingen kunnen variëren in tolerantie.

Veelgestelde vragen

The head profile on the screw has deformed to such an extent that it cannot be unscrewed with a screwdriver. Which Unior tool can be used in this case?

407/4DP screw pliers are the best choice for unscrewing screws with a damaged head profile.