Dana tekefonike të rrafshta

508/1BI




Profiles

Standards

DIN ISO 5745

Product features

- Materiali: çeliku të veçantë mjet
- rënie të falsifikuara, ngurtësuar tërësisht dhe nevrik
- prerja buzë induksion thekur
- kreu i lëmuar
- përfundojë sipërfaqe: krom kromuar për ISO 1456:2009 standarde
- të rënda në detyrë të dyfishtë - komponent trajton
- sipërfaqe flakta dhëmbëzuar
- bërë sipas standardit ISO 5745
- edhe për shtrëngoni dhe ndan e nga kabllot dhe objekte të tjera të ndjeshme

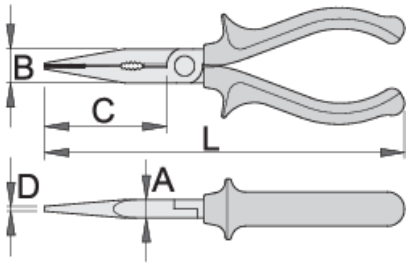

	L	B	D	A	C	
607876	170	17	2.5	9	61	156
607877	200	17	2.5	9	77	191

Kapaciteti i prerjes (10N = 1 kg)

	L	max 1560 N/mm² ØT	max 750 N/mm² ØT
607876	170	1,6	2,0
607877	200	1,8	2,5

* Imazhet e produkteve janë simbolike. Të gjitha dimensionet janë në mm, pesha në gram.Të gjitha dimensionet e listuara mund të ndryshojnë në tolerancë.

Frequently asked questions

The head profile on the screw has deformed to such an extent that it cannot be unscrewed with a screwdriver. Which Unior tool can be used in this case?
407/4DP screw pliers are the best choice for unscrewing screws with a damaged head profile.