
Pinza a becchi lunghi diritti con tagliente laterale e presa tubi

508/1BI

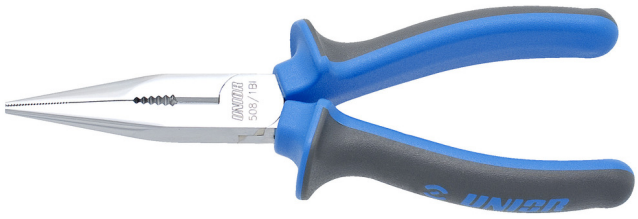


Profili

Standard

DIN ISO 5745

Attributi del prodotto

- materiale: acciaio al carbonio plus premium
- forgiato a caldo, interamente bonificato e temprato
- bordi di taglio induriti a induzione
- teste lucidate
- finitura superficiale: cromata EN 12540
- robusta impugnatura bicomponente
- superficie di presa zigrinata
- conforme allo standard ISO 5745
- anche per stringere e separare cavi e altri oggetti sensibili

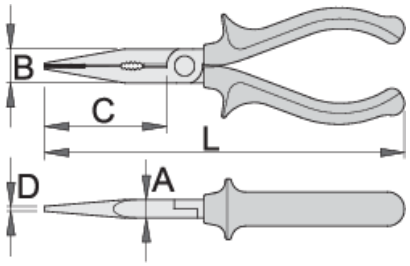

	L	B	D	A	C	
607876	170	17	2.5	9	61	156
607877	200	17	2.5	9	77	191

capacità di taglio (10N=1kg)

	L	max 1560 N/mm² Ø	max 750 N/mm² Ø
607876	170	1,6	2,0
607877	200	1,8	2,5

* Le immagini dei prodotti sono puramente simboliche. Tutte le dimensioni sono in mm, peso in grammi.

Frequently asked questions

The head profile on the screw has deformed to such an extent that it cannot be unscrewed with a screwdriver. Which Unior tool can be used in this case?
407/4DP screw pliers are the best choice for unscrewing screws with a damaged head profile.