

Свивлива челуст на стега со федер

1693.2-US




Profiles



Product features

- Со можност за монтирање на работна маса или на ѕид
- Наменето за професионални и домашни работилници.
- Сталакот е погоден за цевки со дијаметар од мин. Ø24 mm и макс. Ø 38 mm

- Лесно достапниот штраф ни овозможува да го модифицираме отварањето на челуста и притисокот кога е затворена. Штрафот може да се заврти со рака, без употреба на било каков клуч.

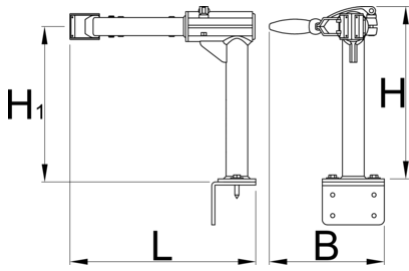

625020

24

32

120


239

313


4600

* Сликите на производите се симболични. Сите димензии се во мм, тежината е во грамови. Сите наведени димензии може да се разликуваат во ниво на толеранција


Usage (pictures)



Mount stand on wooden bench? To mount the stand on a wooden bench, prepare the holes with drill size 6 mm and use the attached screws (O) as shown on picture.



Mount stand on wall? To mount the stand to the wall, prepare the holes with drill size 10 mm and use attached screw anchors and screws (R).



Adjust jaw angle and clamp bike safely? To adjust the bike stand jaw angle, release lever (S) and adjust/rotate (T).



Adjust opened jaw (U) to seatpost or bike tube. Turn handle (V) until jaw firmly grabs the tube.



Release bike from stand? To release, firmly hold bike frame. Flip handle (Y) to quickly release tube from the jaw.

Spare parts



Replaceable rubber covers for clamp, round, 2 pcs set



Заменливи гумени облоги за челусти за 1693.1, 2 парчиња во гарнитура

Related products



Челуст со прилагодлива завртка за на сид и пулт