

벽 또는 벤치 장착 클램프, 수동 조절 가능

1693.2S-US




프로파일



제품 특징

- 벤치 또는 벽 마운트는 옵션입니다.
- 전문가 및 홈 워크샵을 위한 제품입니다.


- 최소 Ø24 mm 및 최대 Ø40mm 직경의 튜브에 적합합니다.
- 접근이 용이한 나사를 사용하면 조를 열거나 닫을때의 압력을 수정할 수 있습니다. 나사는 렌치를 사용하지 않고 손으로 돌릴 수 있습니다.

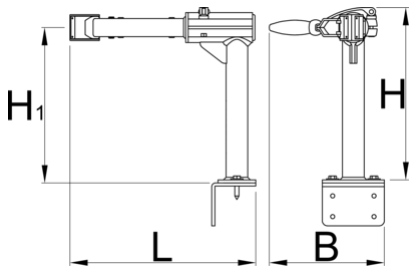


| | | | | | | |
|--------|----|----|-----|-----|-----|------|
| | | | | | | |
| 625021 | 24 | 38 | 120 | 239 | 313 | 4200 |

* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.


사용법 (사진)



Mount stand on wooden bench? To mount the stand on a wooden bench, prepare the holes with drill size 6 mm and use the attached screws (O) as shown on picture.




Mount stand on wall? To mount the stand to the wall, prepare the holes with drill size 10 mm and use attached screw anchors and screws (R).




Adjust jaw angle and clamp bike safely? To adjust the bike stand jaw angle, release lever (S) and adjust/rotate (T).



Adjust opened jaw (U) to seatpost or bike tube. Turn handle (V) until jaw firmly grabs the tube.



To adjust jaw opening, turn the long screw (Z) with hand in needed direction.



Release bike from stand? To release, firmly hold bike frame. Flip handle (Y) to quickly release tube from the jaw.

스페어 파트



클램프용 교체 가능한 고무 커버, 원형, 2개 세트

관련 제품



벽 또는 벤치 장착 클램프, 자동 조절 가능