

Nástenné a stolové čeluste s nastaviteľnou maticou

1693.2S-US




Profiles



Product features

- Možnosť upevniť na pracovný stôl alebo stenu.
- Navrhnuté pre profesionálne aj domáce dielne.

- Vhodné pre rúrky s priemerom min. Ø24 mm a max. Ø40 mm.
- Ľahko prístupná skrutka umožňuje upraviť čeluste a tlak pri zovretí. Skrutku je možné otočiť ručne bez použitia akéhokoľvek kľúča.

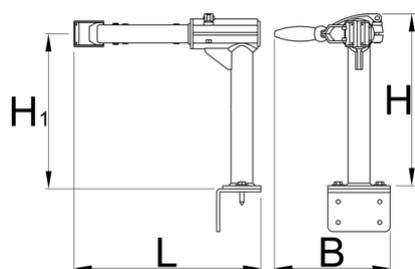

625021

24

38

120


239

313


4200

* Obrázky sú symbolické. Všetky rozmery sú v mm, hmotnosť je v g. Všetky udané rozmery sa môžu líšiť v rámci tolerancie.


Usage (pictures)



Mount stand on wooden bench? To mount the stand on a wooden bench, prepare the holes with drill size 6 mm and use the attached screws (O) as shown on picture.




Mount stand on wall? To mount the stand to the wall, prepare the holes with drill size 10 mm and use attached screw anchors and screws (R).




Adjust jaw angle and clamp bike safely? To adjust the bike stand jaw angle, release lever (S) and adjust/rotate (T).



Adjust opened jaw (U) to seatpost or bike tube. Turn handle (V) until jaw firmly grabs the tube.



To adjust jaw opening, turn the long screw (Z) with hand in needed direction.



Release bike from stand? To release, firmly hold bike frame. Flip handle (Y) to quickly release tube from the jaw.

Spare parts



Vymeniteľné gumené kryty na svorku, okrúhle, sada 2 ks

Related products



Otočné zvieracie čeluste pre upevnenie na pracovný stôl alebo stenu