

# Telefoontang met snijkanten, vertand, recht

508/4G



## Profielen

---




## Standaard

---

DIN ISO 5745

## Product attributen

- materiaal: premium plus carbonstaal
- drop forged, entirely hardened and tempered
- cutting edges induction hardened
- head surface finish: finely ground
- surface finish: phosphated to standard ISO 9717
- heavy duty plastic handles
- gripping surface serrated
- made according to standard ISO 5745
- ook voor het klemmen en scheiden van kabels en andere kwetsbare items

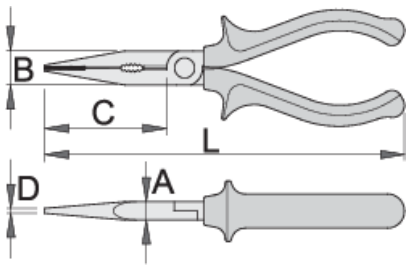

	L	B	D	A	C	
608710	170	17	2.5	9	61	156
608711	200	17	2.5	9	77	191

knipcapaciteit (10N=1kg)

	L	max 1600 N/mm <sup>2</sup> Ø↑	max 650 N/mm <sup>2</sup> Ø↑
608710	170	1,6	2,0
608711	200	1,8	2,5

\* Afbeeldingen van producten zijn symbolisch. Alle afmetingen zijn in mm en gewicht in gram. Alle vermelde afmetingen kunnen variëren in tolerantie.

## Veelgestelde vragen

**The head profile on the screw has deformed to such an extent that it cannot be unscrewed with a screwdriver. Which Unior tool can be used in this case?**

407/4DP screw pliers are the best choice for unscrewing screws with a damaged head profile.