

Telefoontang met snijkanten, vertand, recht

508/4G



Profielen

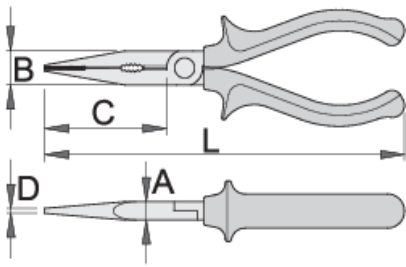




Standaard

DIN ISO 5745


Product attributen

- materiaal: premium plus carbonstaal
- drop forged, entirely hardened and tempered
- cutting edges induction hardened
- head surface finish: finely ground
- surface finish: phosphated to standard ISO 9717
- heavy duty plastic handles
- gripping surface serrated
- made according to standard ISO 5745
- ook voor het klemmen en scheiden van kabels en andere kwetsbare items



	L	B	D	A	C	
608710	170	17	2.5	9	61	156
608711	200	17	2.5	9	77	191

knipcapaciteit (10N=1kg)

	L	max 1600 N/mm ² Ø↑	max 650 N/mm ² Ø↑
608710	170	1,6	2,0
608711	200	1,8	2,5

* Afbeeldingen van producten zijn symbolisch. Alle afmetingen zijn in mm en gewicht in gram. Alle vermelde afmetingen kunnen variëren in tolerantie.

Veelgestelde vragen

The head profile on the screw has deformed to such an extent that it cannot be unscrewed with a screwdriver. Which Unior tool can be used in this case?

407/4DP screw pliers are the best choice for unscrewing screws with a damaged head profile.