

Kliješta mehaničarska, kosa

512/1BI




Profilii



Atributi proizvoda

- materijal: Premium plus alatni čelik
- kovana, potpuno poboljšana i ojačana
- rezni rubovi induktivno kaljeni
- čeljusti polirane
- završna obrada: kromiranje po standardu ISO 1456:2009
- robuse ručke izolirane dvokomponentnim navlakama
- nazubljena stezna površina
- čeljusti zakrivljene pod kutem od 45°
- duge, savijene čeljusti omogućuju jednostavan i precizan prihvatanje matica i vijaka
- robuse čeljusti kliješta omogućuju dobar prihvatanje
- izrađeno po standardu ISO5745

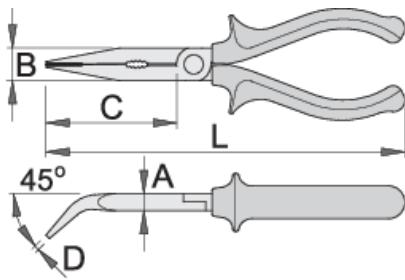


	L	B	D	A	C	
607966	170	17	2.5	9	61	152
607967	200	17	2.5	9	77	204

sposobnost rezanja (10N=1kg)

	L	max 1560 N/mm ² Ø†	max 750 N/mm ² Ø†
607966	170	1,6	2,0
607967	200	1,8	2,5

* Slike proizvoda su simbolične. Sve dimenzije su u mm, masa je u g.

Upotreba (pictures)



Frequently asked questions

The head profile on the screw has deformed to such an extent that it cannot be unscrewed with a screwdriver. Which Unior tool can be used in this case?

407/4DP screw pliers are the best choice for unscrewing screws with a damaged head profile.