Pinza a becchi lunghi piegati con tagliente laterale e presa tubi


512/4G



Profili

Attributi del prodotto

- materiale: acciaio al carbonio plus premium
- interamente bonificato
- bordi di taglio induriti a induzione
- teste molate
- finitura superficiale: fosfatata ISO 9717
- superficie di presa zigrinata
- ganasce piegate a 45°
- robusta impugnatura di plastica
- le ganasce lunghe piegate permettono un semplice e preciso serraggio di dadi e viti
- le resistenti ganasce permettono una buona presa

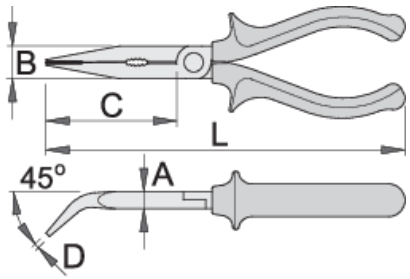


	L	B	D	A	C	
608720	170	17	2.5	9	61	152
608721	200	17	2.5	9	77	204

capacità di taglio (10N=1kg)

	L	max 1560 N/mm² ØT	max 750 N/mm² ØT
608720	170	1,6	2,0
608721	200	1,8	2,5

* Le immagini dei prodotti sono puramente simboliche. Tutte le dimensioni sono in mm, peso in grammi.

Utilizzo (pictures)



Frequently asked questions

The head profile on the screw has deformed to such an extent that it cannot be unscrewed with a screwdriver. Which Unior tool can be used in this case?
407/4DP screw pliers are the best choice for unscrewing screws with a damaged head profile.