

Verstelbare pijptang

494/6



Profielen


Premium 

Product attributen

- the handle is drop forged from special tool steel
- jaw guide made from special alloy
- working surfaces induction hardened
- teeth ground
- lacquered

Gebruik:

- grijpen, draaien of vastschroeven van ronde of meer kantige buizen, moeren en flenzen

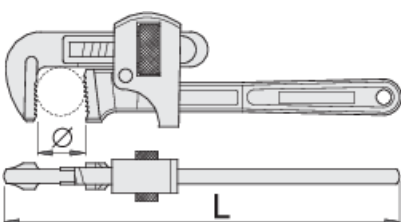

619786

L"

8"



3/4"

O_{max}




27

L

200



280

	L"		Omax	L	
619787	10"	1"	35	250	580
619788	12"	1.1/4"	43	300	780
619789	14"	1.1/2"	50	350	1050
619790	18"	2"	60	450	1808
619791	24"	2.1/2"	76	600	3250
619792	36"	3.1/2"	100	900	6300

* Afbeeldingen van producten zijn symbolisch. Alle afmetingen zijn in mm en gewicht in gram. Alle vermelde afmetingen kunnen variëren in tolerantie.

Gebruik (Afbeeldingen)



Onderdelen



Set of spare parts for 494/6

Veelgestelde vragen

Maakt het uit of ik een pijptang model 492 of 494 gebruik?

De functionaliteiten van beide pijptangen zijn volledig identiek.