

# Verstelbare pijptang

494/6



## Profielen


**Premium** 

## Product attributen

- the handle is drop forged from special tool steel
- jaw guide made from special alloy
- working surfaces induction hardened
- teeth ground
- lacquered

## Gebruik:

- grijpen, draaien of vastschroeven van ronde of meer kantige buizen, moeren en flenzen

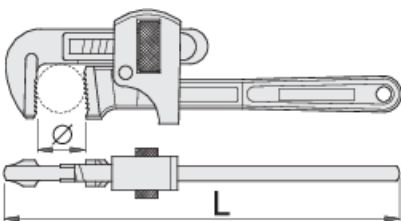

619786

L"

8"



3/4"

O<sub>max</sub>

27

L








200



280



Till end of stock

						
619787	10"	1"	35	250	580	Till end of stock
619788	12"	1.1/4"	43	300	780	Till end of stock
619789	14"	1.1/2"	50	350	1050	
619790	18"	2"	60	450	1808	
619791	24"	2.1/2"	76	600	3250	
619792	36"	3.1/2"	100	900	6300	

\* Afbeeldingen van producten zijn symbolisch. Alle afmetingen zijn in mm en gewicht in gram. Alle vermelde afmetingen kunnen variëren in tolerantie.

## Gebruik (Afbeeldingen)



## Onderdelen



Set of spare parts for 494/6

## Veelgestelde vragen

### **Maakt het uit of ik een pijptang model 492 of 494 gebruik?**

De functionaliteiten van beide pijptangen zijn volledig identiek.