# 斜嘴钳

461/1BI



## 配置文件

## 标准

DIN ISO 5749

## 产品属性

- 材料:优质高碳钢
- 落锻，完全淬火与回火
- 切削刃感应淬火
- 头部抛光
- 表面处理：根据ISO 1456:2009标准镀铬
- 重型双成分材料手柄
- 根据ISO 5749标准生产

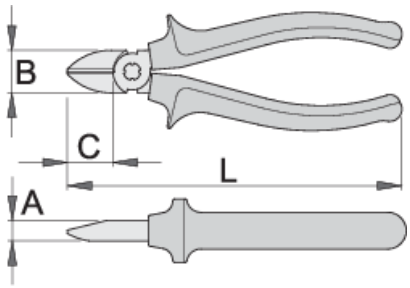


| | L | B | A | C | |
|---|---|---|---|---|---|
| 607883 | 140 | 19 | 9.5 | 18 | 169 |
| 607884 | 160 | 22.5 | 10 | 22 | 214 |

cutting capacity (10N=1kg)

| | L | max 1560 N/mm² Ø | max 750 N/mm² Ø |
|---|---|---|---|
| 607883 | 140 | 1,6 | 2,0 |
| 607884 | 160 | 1,6 | 2,5 |

* Images of products are symbolic. All dimensions are in mm, and weight is in grams. All listed dimensions may vary in tolerance.

## 用途 (pictures)

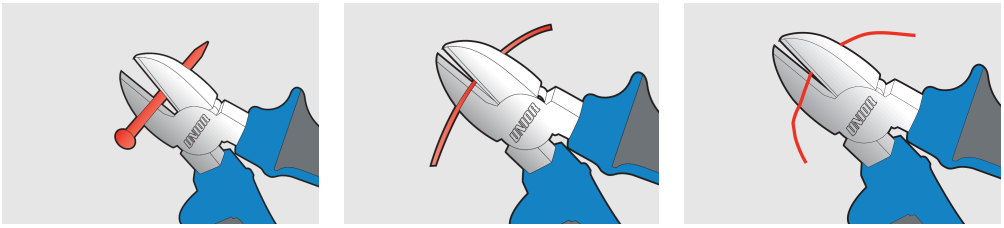

# Frequently asked questions

**What does it mean that the pliers are quenched and tempered and the head parts/teeth of the pliers are inductively hardened?**
It means that the pliers are thermally processed by quenching and tempering their entire surface to a hardness of about 45HRc, while head parts are additionally inductively hardened to a hardness of at least 60HRc.

**What is meant by the statement that pliers are made in accordance with the stated ISO standard?**
It means that the pliers are in accordance with the international standard in terms of dimensions, strength and structure, and compliance is determined by prescribed tests.