

# Alicate corte diagonal

461/1BI



## Perfiles

---




## Normas

---

DIN ISO 5749

## Características del producto

- Material: composición especial para temple y endurecimiento
- totalmente templado y revenido
- filos templados por inducción
- cabezas pulidas
- acabado: cromado según ISO 1456:2009
- mangos en doble componente para trabajos duros
- fabricada totalmente de acuerdo con ISO 5749

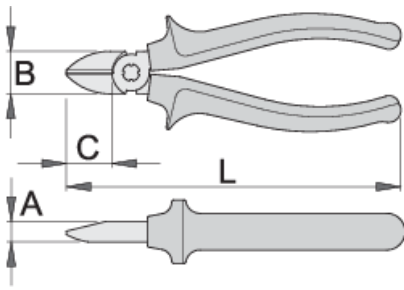


Barcode	L	B	A	C	Weight
607883	140	19	9.5	18	169
607884	160	22.5	10	22	214

capacidad de corte ( 10N=1Kg)

Barcode	L	max 1600 N/mm <sup>2</sup> Ø↑	max 650 N/mm <sup>2</sup> Ø↑
607883	140	1,6	2,0
607884	160	1,6	2,5

\* Las imágenes de los productos son simbólicas. Todas las dimensiones son en mm, peso en gramos.

## Empleo (imágenes)

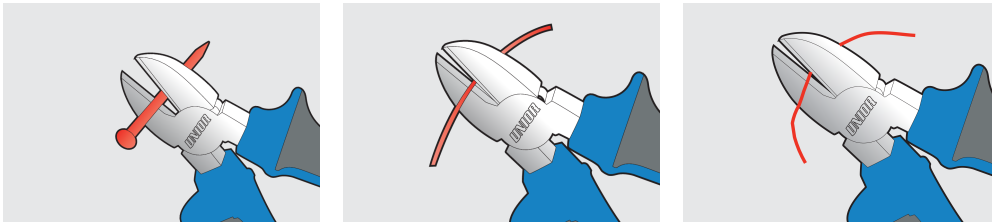

## Preguntas frecuentes

### What does it mean that the pliers are quenched and tempered and the head parts/teeth of the pliers are inductively hardened?

It means that the pliers are thermally processed by quenching and tempering their entire surface to a hardness of about 45HRc, while head parts are additionally inductively hardened to a hardness of at least 60HRc.

### What is meant by the statement that pliers are made in accordance with the stated ISO standard?

It means that the pliers are in accordance with the international standard in terms of dimensions, strength and structure, and compliance is determined by prescribed tests.