

Oldalcsípőfogó

461/1BI



Profilok




Szabványok

DIN ISO 5749

Termékjellemzők

- anyaga: Premium Plus szénacél
- kovácsolt, teljes anyagában nemesített
- vágóélek indukciósan edzettek
- fej polírozott
- felületkezelés: trivalens krómozott, ISO 1456:2009 szabvány szerint
- megerősített, kétkomponensű markolat
- ISO 5749 szabvány szerint

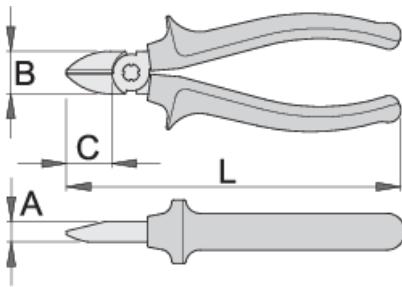


Barcode	L	B	A	C	
607883	140	19	9.5	18	169
607884	160	22.5	10	22	214

vágási képesség ($10 \text{ N} = 1 \text{ kg}$)

Barcode	L	max 1560 N/mm^2 Ø↑	max 750 N/mm^2 Ø↑
607883	140	1,6	2,0
607884	160	1,6	2,5

* A termékképek illusztrációk. minden feltüntetett méret milliméterben, a tömegek grammban. Az összes feltüntetett méret eltérhet a toleranciának megfelelően.

Használat (pictures)

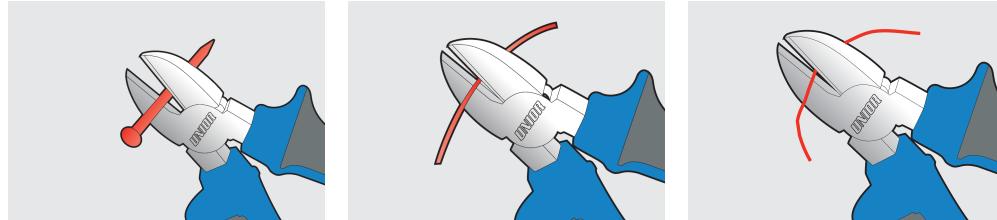

Frequently asked questions

What does it mean that the pliers are quenched and tempered and the head parts/teeth of the pliers are inductively hardened?

It means that the pliers are thermally processed by quenching and tempering their entire surface to a hardness of about 45HRc, while head parts are additionally inductively hardened to a hardness of at least 60HRc.

What is meant by the statement that pliers are made in accordance with the stated ISO standard?

It means that the pliers are in accordance with the international standard in terms of dimensions, strength and structure, and compliance is determined by prescribed tests.