

# Zijsnijtang

461/4G



## Profielen

---



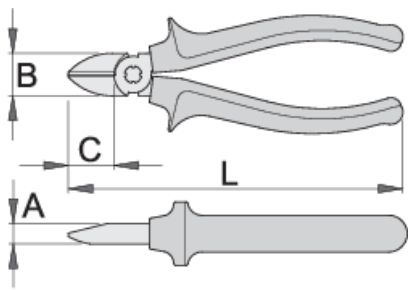
## Standaard



---

DIN ISO 5749


## Product attributen

- materiaal: premium plus carbonstaal
- drop forged, entirely hardened and tempered
- cutting edges induction hardened
- head surface finish: finely ground
- surface finish: phosphated to standard ISO 9717
- heavy duty plastic handles
- made according to standard ISO 5749



	L	B	A	C	
608697	140	19	9.5	18	169
608698	160	22.5	10	22	214

knipcapaciteit (10N=1kg)

	L	max 1600 N/mm <sup>2</sup> Ø↑	max 650 N/mm <sup>2</sup> Ø↑
608697	140	1,6	2,0
608698	160	1,6	2,5

\* Afbeeldingen van producten zijn symbolisch. Alle afmetingen zijn in mm en gewicht in gram. Alle vermelde afmetingen kunnen variëren in tolerantie.

Gebruik (Afbeeldingen)

