

Dana anësore të forta për prerje

466/1BI



Profiles

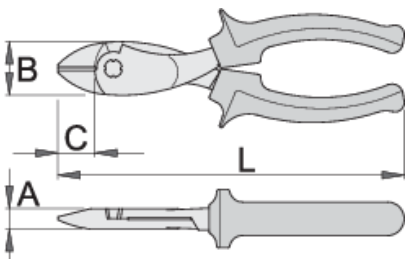




Standards

DIN ISO 5749


Product features

- Materiali: çeliku të veçantë mjet
- rënie të falsifikuara, ngurtësuar tërësisht dhe nevrrik
- prerja buzë induksion thekur
- kreu i lëmuar
- përfundojë sipërfaqe: krom kromuar për ISO 1456:2009 standarde
- të rënda në detyrë të dyfishtë - komponent trajton
- bërë sipas standardit ISO 5749



	L	B	A	C	
617686	160	23.5	10	20.5	214
608850	180	28	11	20	313
608837	200	27	11	21	344

Kapaciteti i prerjes (10N = 1 kg)

	L	max 2150 N/mm ² Ø↑	max 650 N/mm ² Ø↑
617686	160	1,6	2,5
608850	180	1,8	3,0
608837	200	2,0	3,5

* Imazhet e produkteve janë simbolike. Të gjitha dimensionet janë në mm, pesha në gram. Të gjitha dimensionet e listuara mund të ndryshojnë në tolerancë.

Frequently asked questions

What does it mean that the pliers are quenched and tempered and the head parts/teeth of the pliers are inductively hardened?

It means that the pliers are thermally processed by quenching and tempering their entire surface to a hardness of about 45HRc, while head parts are additionally inductively hardened to a hardness of at least 60HRc.

What is meant by the statement that pliers are made in accordance with the stated ISO standard?

It means that the pliers are in accordance with the international standard in terms of dimensions, strength and structure, and compliance is determined by prescribed tests.