

Alicate corte diagonal reforzado

466/1BI



Perfiles

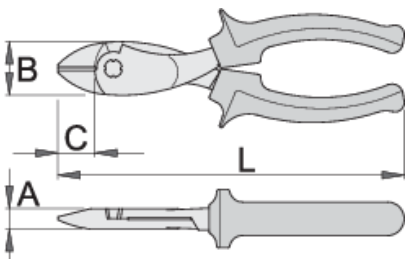




Normas

DIN ISO 5749


Características del producto

- Material: composición especial para temple y endurecimiento
- totalmente templado y revenido
- filos templados por inducción
- cabezas pulidas
- acabado: cromado según ISO 1456:2009
- mangos en doble componente para trabajos duros
- fabricada totalmente de acuerdo con ISO 5749



	L	B	A	C	
617686	160	23.5	10	20.5	214
608850	180	28	11	20	313
608837	200	27	11	21	344

capacidad de corte (10N=1Kg)

	L	max 2150 N/mm ² Ø↑	max 650 N/mm ² Ø↑
617686	160	1,6	2,5
608850	180	1,8	3,0
608837	200	2,0	3,5

* Las imágenes de los productos son simbólicas. Todas las dimensiones son en mm, peso en gramos.

Preguntas frecuentes

What does it mean that the pliers are quenched and tempered and the head parts/teeth of the pliers are inductively hardened?

It means that the pliers are thermally processed by quenching and tempering their entire surface to a hardness of about 45HRc, while head parts are additionally inductively hardened to a hardness of at least 60HRc.

What is meant by the statement that pliers are made in accordance with the stated ISO standard?

It means that the pliers are in accordance with the international standard in terms of dimensions, strength and structure, and compliance is determined by prescribed tests.