

# Tronchese a grande effetto a tagliente diagonale

466/1BI



## Profili

---




## Standard

---

DIN ISO 5749

## Attributi del prodotto

- materiale: acciaio al carbonio plus flex premium
- forgiato a caldo, interamente bonificato e temprato
- bordi di taglio induriti a induzione
- teste lucidate
- finitura superficiale: cromata EN 12540
- robusta impugnatura bicomponente
- conforme allo standard ISO 5749

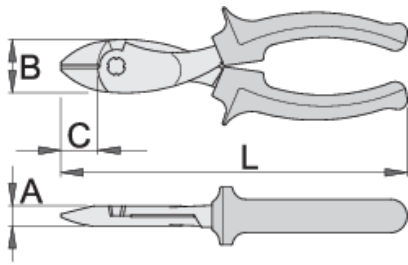

Barcode	L	B	A	C	Weight
617686	160	23.5	10	20.5	214
608850	180	28	11	20	313
608837	200	27	11	21	344

capacità di taglio (10N=1kg)

Barcode	L	max 2150 N/mm <sup>2</sup> Ø↑	max 650 N/mm <sup>2</sup> Ø↑
617686	160	1,6	2,5
608850	180	1,8	3,0
608837	200	2,0	3,5

\* Le immagini dei prodotti sono puramente simboliche. Tutte le dimensioni sono in mm, peso in grammi.

## Frequently asked questions

### What does it mean that the pliers are quenched and tempered and the head parts/teeth of the pliers are inductively hardened?

It means that the pliers are thermally processed by quenching and tempering their entire surface to a hardness of about 45HRc, while head parts are additionally inductively hardened to a hardness of at least 60HRc.

### What is meant by the statement that pliers are made in accordance with the stated ISO standard?

It means that the pliers are in accordance with the international standard in terms of dimensions, strength and structure, and compliance is determined by prescribed tests.