Ključ moment, brzo podesivi

263



Profili

Atributi proizvoda

- Točnost: +/-3%
- Mikro skala za jednostavno podešavanje bez grešaka
- Mogućnost fiksiranja željenog momenta
- Brzo podešavanje - dovoljno je osam (8) okretaja da se pokrije cijela skala
- Djelovanje okretnog momenta: u oba smjera, ali uvijek koristite smjer koji je trenutno podešen na dršci moment ključa
- Materijal ručke: dvokomponentni materijal
- Dvojna skala: lbf.ft i Nm
- Dodatni stalak za pohranu alata pomaže da se ključ otkoči i podesi željeni obrtni moment.
- radni ugao: 5°
- Izrađeni prema standardu ISO 6789

Garancija

- Garancija godinu dana
- Produžite garanciju (https://uniortools.com/slo/support/product-registration)

Važno!

- Moment ključ ne koristite za odvijanje!

- Moment ključ vrši pritezanje samo u smjeru prikazanom na naljepnici ključa. Naljepnica označava ispravan smjer pritezanja!
- Predviđeni period za rekalibraciju moment ključa je 12 mjeseci ili približno 5.000 mjerenja od dana kupnje
- Nakon mjerenja UVIJEK podesite mjerni mehanizam na početnu poziciju.
- Kada postignete željeni moment, odmah prestanite sa stezanjem
- Moment ključ se u slučaju nepridržavanja uputa za upotrebu može oštetiti



		Nm	lbf.ft	L	
626765	3/8"	12 - 60	10 - 45	328	700
626766	1/2"	40 - 200	30 - 150	459	1000
626767	1/2"	60 - 340	50 - 250	679	1550

* Slike proizvoda su simbolične. Sve dimenzije su u mm, masa je u g.

upotreba (pictures)



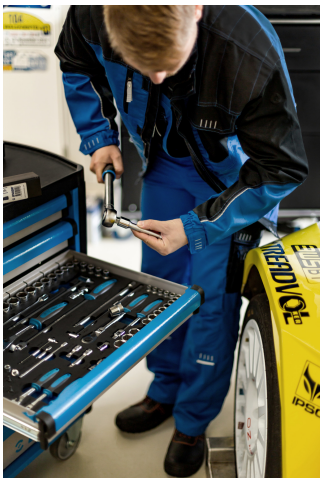








Photo (pictures)



Safety tips

- Only an authorised person in a certificated service centre can perform technical maintenance.
- Tools should always be serviced and calibrated by a certified service engineer.
- Tool should only be used for precise tightening as specified in the instruction manual.
- Check instruction manual on how to read the value scale on the tool properly.
- Stop tightening after hearing a feedback from the tool.
- Use only sockets with the same square drive.
- Always return the value on the scale back to 0 after usage and before storing.

Safety (pictures)



