

Ključ okasti udarni, za siguran rad na visini

184/7-H



Profili


Premium 





Atributi proizvoda

- materijal: Premium poseban alatni čelik
- kovan, u cijelosti ojačan i zakaljen
- završna obrada: antikorozivni premaz uljem
- izrađeni prema standardu DIN 7444 (samo metričke dimenzije)

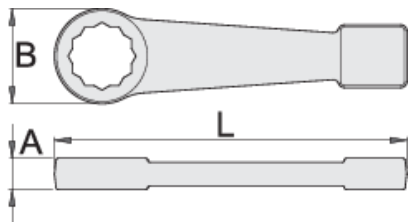Prednosti:

- kovana metalna kopča koja se ne može rastaviti
- na svakom je alatu označena težina alata
- u kopču je moguće učvrstiti dva karabina, što omogućuje sigurnu zamjenu alata
- Alat Unior je prilagođen radu na visini i održava osnovne funkcije alata



		L	B	A		
626344	24	180	48,6	16	579	
626345	27	180	48,6	16	555	
626346	30	180	48,6	16	532	
626347	32	190	58,4	18	762	
626348	36	190	58,4	18	745	
626349	41	235	74	22	1466	
626350	46	235	74	22	1397	
626351	50	235	74	22	1329	
626360	1.1/16"	180	49	16	550	Till end of stock
626361	1.1/8"	180	49	16	549	Till end of stock
626363	1.1/4"	190	58	18	775	Till end of stock
626364	1.5/16"	190	58	18	763	Till end of stock
626365	1.3/8"	190	58	18	748	Till end of stock
626366	1.7/16"	190	58	18	722	Till end of stock
626367	1.1/2"	235	74	22	1484	Till end of stock
626368	1.5/8"	235	74	22	1477	Till end of stock
626369	1.11/16"	235	74	22	1477	Till end of stock
626370	1.3/4"	235	74	22	1407	Till end of stock
626371	1.13/16"	235	74	22	1414	Till end of stock
626372	1.7/8"	235	74	22	1398	Till end of stock
626373	2"	235	74	22	1323	Till end of stock

* Slike proizvoda su simbolične. Sve dimenzije su u mm, masa je u g.


upotreba (pictures)




Pričvrstite karabiner na remenu za vezivanje na kopču alata. Kopče su dovoljno velike da drže 2 karabinera.




Karabiner se mora osigurati od otvaranja zatezanjem matice.



Prije skidanja alata s remena, odvrnite maticu na karabineru.



Otkopčajte karabiner na remenu i uklonite alat pričvršćen za uzicu. Alat je sada spreman za rad.



Na slici je prikazan pravilno pričvršćen alat na remenu za vezivanje s kojim koristimo alat.



Pritisnite iglu u rupu s alatom za rastavljanje nasadnog ključa (stavka 1111), te istovremeno uklonite nasadni ključ sa račne i zamijenite nasadni ključ ili nastavak.

Safety tips



- Always change tools in secure areas where there is no risk of falling tools.
- Always use tools with Unior carabiners and never use carabiners with a diameter less than 6mm.
- Tools being used at height should regularly be checked for damage and that there is no damage to lanyards, carabiners, attachment rings or belts.



- Don't use tools without attaching them to your work belt when working at height.
- Don't use and fix damaged tools.
- Don't exceed maximum weight of 2.3kg for individual tools that a worker can attach to their belt.

Safety (pictures)



Frequently asked questions

Can we use a tool for working at height as a normal tool?

A tool for working at height has the same usability as a normal tool, except that a non-removable riveted metal buckle is added to this tool.

Does the stated weight per tool for safe work at height also include the weight of the metal ring?

The weight of the tool marked on the tool, included also weight of metal ring