

Chei inelare de soc, pentru lucrul in siguranta la inaltime

184/7-H



Profile

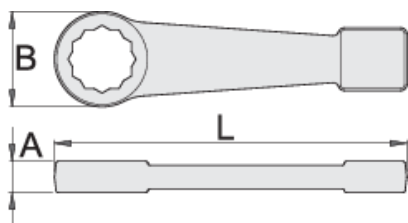
Premium 




Caracteristicile produsului

- material: otel carbon de scule
- forjata, calire si revenire totala
- Acoperire: uleiare anticoroziva
- in concordanta cu standardul DIN 7444(numai dimensiunile in mm)

Avantaje:

- Inel metalic nituit
- Greutatea uneltei este marcata pe fiecare in parte
- Inelele de pe unelte sunt suficient de mari pentru a accepta 2 carabiniere
- Uneltele pentru lucrul la înălțimi ale lui Unior au fost concepute pentru a păstra funcțiile de bază, ergonomia și utilitatea uneltelor sau pentru a le reduce cât mai puțin posibil.



		L	B	A	
626344	24	180	48,6	16	579
626345	27	180	48,6	16	555
626346	30	180	48,6	16	532
626347	32	190	58,4	18	762
626348	36	190	58,4	18	745
626349	41	235	74	22	1466
626350	46	235	74	22	1397
626351	50	235	74	22	1329
626360	1.1/16"	180	49	16	550
626361	1.1/8"	180	49	16	549
626363	1.1/4"	190	58	18	775
626364	1.5/16"	190	58	18	763
626365	1.3/8"	190	58	18	748
626366	1.7/16"	190	58	18	722
626367	1.1/2"	235	74	22	1484
626368	1.5/8"	235	74	22	1477
626369	1.11/16"	235	74	22	1477
626370	1.3/4"	235	74	22	1407
626371	1.13/16"	235	74	22	1414
626372	1.7/8"	235	74	22	1398
626373	2"	235	74	22	1323

* Imaginea produsului este simbolica. Toate dimensiunile sunt exprimate în mm, greutatea în grame.

0 (pictures)



The carabiner on the lanyard is attached to the ring on the tool. The rings on the tools are large enough to accept 2 carabiners.



The carabiner on the lanyard has to be protected against opening using a lock ring.



Before removing the tool from the belt, unscrew the lock ring on the carabiner on the belt.



Open the carabiner on the belt and remove the tool, which is attached to a lanyard, from the carabiner on the belt. The tool is now ready for use.



Correct attachment of the tool to the lanyard. Return the tool to the belt following the steps in reverse order.



Using the socket remover (Article 1111) depress the pin in the hole while removing the socket from the square drive of the ratchet and then switch the socket or extension.

Safety tips



- Always change tools in secure areas where there is no risk of falling tools.
- Always use tools with Unior carabiners and never use carabiners with a diameter less than 6mm.
- Tools being used at height should regularly be checked for damage and that there is no damage to lanyards, carabiners, attachment rings or belts.



- Don't use tools without attaching them to your work belt when working at height.
- Don't use and fix damaged tools.
- Don't exceed maximum weight of 2.3kg for individual tools that a worker can attach to their belt.

Safety (pictures)



Frequently asked questions

Putem folosi un instrument pentru lucrul la înălțime ca un instrument normal?

Un instrument pentru lucrul la înălțime are aceeași utilitate ca un instrument normal, cu excepția faptului că la acest instrument se adaugă o cataramă metalică nituită nedetașabilă.

Greutatea declarată pe unealtă pentru lucrul în condiții de siguranță la înălțime include, de asemenea, greutatea inelului metalic?

Greutatea instrumentului marcat pe instrument, a inclus, de asemenea, greutatea inelului metalic