

Çakma yıldız anahtar, yüksekliklerde güvenli çalışma için

184/7-H



Profiles


Premium 

Product features

- malzeme: özel alet çeliği
- sıcak dövme, tamamen sertleştirilmiş ve temperlenmiş
- yüzey bitirme: antikorozyf yağlı
- DIN 7444 standardına göre yapılmıştır (yalnızca metrik boyut)

Avantajları:

- çıkarılmayan perçinli metal halka
- takım ağırlığı her takımın üzerinde işaretlenmiştir
- aletlerin üzerindeki halkalar 2 karabinayı alacak kadar büyüktür
- Unior'un yükseklikte çalışma aletleri, araçların temel işlevlerini, ergonomisini ve kullanılabilirliğini korumak veya bunları mümkün olan en küçük ölçüde azaltmak için tasarlanmıştır.

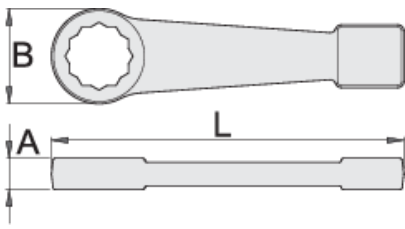

Barcode	mm	L	B	A	Weight	Stock
626344	24	180	48,6	16	579	
626345	27	180	48,6	16	555	
626346	30	180	48,6	16	532	
626347	32	190	58,4	18	762	
626348	36	190	58,4	18	745	
626349	41	235	74	22	1466	
626350	46	235	74	22	1397	
626351	50	235	74	22	1329	
626360	1.1/16"	180	49	16	550	Till end of stock
626361	1.1/8"	180	49	16	549	Till end of stock
626363	1.1/4"	190	58	18	775	Till end of stock
626364	1.5/16"	190	58	18	763	Till end of stock
626365	1.3/8"	190	58	18	748	Till end of stock
626366	1.7/16"	190	58	18	722	Till end of stock
626367	1.1/2"	235	74	22	1484	Till end of stock
626368	1.5/8"	235	74	22	1477	Till end of stock
626369	1.11/16"	235	74	22	1477	Till end of stock
626370	1.3/4"	235	74	22	1407	Till end of stock
626371	1.13/16"	235	74	22	1414	Till end of stock
626372	1.7/8"	235	74	22	1398	Till end of stock
626373	2"	235	74	22	1323	Till end of stock

* Ürünlerin resimleri semboliktir. Bütün boyutlar mm ve ağırlık gram cinsindedir.

Usage (pictures)



The carabiner on the lanyard is attached to the ring on the tool. The rings on the tools are large enough to accept 2 carabiners.



The carabiner on the lanyard has to be protected against opening using a lock ring.



Before removing the tool from the belt, unscrew the lock ring on the carabiner on the belt.



Open the carabiner on the belt and remove the tool, which is attached to a lanyard, from the carabiner on the belt. The tool is now ready for use.



Correct attachment of the tool to the lanyard. Return the tool to the belt following the steps in reverse order.



Using the socket remover (Article 1111) depress the pin in the hole while removing the socket from the square drive of the ratchet and then switch the socket or extension.

Safety tips



- Always change tools in secure areas where there is no risk of falling tools.
- Always use tools with Unior carabiners and never use carabiners with a diameter less than 6mm.
- Tools being used at height should regularly be checked for damage and that there is no damage to lanyards, carabiners, attachment rings or belts.



- Don't use tools without attaching them to your work belt when working at height.
- Don't use and fix damaged tools.
- Don't exceed maximum weight of 2.3kg for individual tools that a worker can attach to their belt.

Safety (pictures)



Frequently asked questions

Can we use a tool for working at height as a normal tool?

A tool for working at height has the same usability as a normal tool, except that a non-removable riveted metal buckle is added to this tool.

Does the stated weight per tool for safe work at height also include the weight of the metal ring?

The weight of the tool marked on the tool, included also weight of metal ring