

1/2"的双向棘轮扳手

190.1/1ABI-H



配置文件

Premium Flex  

产品属性


- 材料:优质弹性铬钒钢
- 主体锻造
- 完全淬火与回火
- 表面处理：根据ISO 1456:2009标准镀铬
- 75 - 齿
- 4,8° 工作角度

优势：

- 不可拆卸铆接金属环
- 每个工具上都标有工具重量
- 根据ISO3315 - B(附件)及ISO 2725 - 1B(插座)标准制造
- 开关插座和附件需要使用特定的工具(第1111条)
- 带侧孔的插座和附件

谨慎!

- 套筒和附件必须坠落前进行安全区域检查。

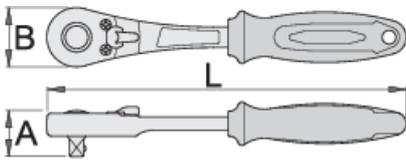

		L	A	B	
626245	1/2"	260	36	45	456

* Images of products are symbolic. All dimensions are in mm, and weight is in grams. All listed dimensions may vary in tolerance.

用途 (pictures)



The carabiner on the lanyard is attached to the ring on the tool. The rings on the tools are large enough to accept 2 carabiners.



The carabiner on the lanyard has to be protected against opening using a lock ring.



Before removing the tool from the belt, unscrew the lock ring on the carabiner on the belt.



Open the carabiner on the belt and remove the tool, which is attached to a lanyard, from the carabiner on the belt. The tool is now ready for use.



Correct attachment of the tool to the lanyard. Return the tool to the belt following the steps in reverse order.



Using the socket remover (Article 1111) depress the pin in the hole while removing the socket from the square drive of the ratchet and then switch the socket or extension.

Safety tips



- Always change tools in secure areas where there is no risk of falling tools.
- Always use tools with Unior carabiners and never use carabiners with a diameter less than 6mm.



- Don't use tools without attaching them to your work belt when working at height.
- Don't use and fix damaged tools.
- Don't exceed maximum weight of 2.3kg for individual tools that a worker can attach to their belt.

- Tools being used at height should regularly be checked for damage and that there is no damage to lanyards, carabiners, attachment rings or belts.

Safety (pictures)



Frequently asked questions

Can we use a tool for working at height as a normal tool?

A tool for working at height has the same usability as a normal tool, except that a non-removable riveted metal buckle is added to this tool.

Does the stated weight per tool for safe work at height also include the weight of the metal ring?

The weight of the tool marked on the tool, included also weight of metal ring