

Combination pliers, for safe work at heights

405/1BI-H



프로파일

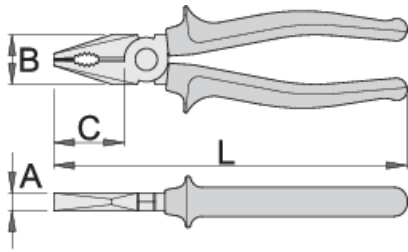




제품 특징

- material: premium plus carbon steel
- drop forged, entirely hardened and tempered
- cutting edges induction hardened
- head polished
- surface finish: trivalent chrome plated according to ISO 1456:2009
- heavy duty double - component handles
- made according to standard ISO 5746


장점:

- In order to ensure the highest level of safety, the riveted metal ring is not mounted only through the plastic handles but is attached through the metal part of the tool handle.
- non-removable riveted metal ring
- tool weight is marked on each tool
- the rings on the tools are large enough to accept 2 carabiners
- Unior's tools for working at heights have been designed to preserve the tools' basic functions, ergonomics and utility, or to reduce them to the smallest possible extent.



	L	B	C	A	
626958	160	24	35	9,5	223
626959	180	27	38	10	274

cutting capacity (10N=1kg)

	L	max 1560 N/mm ² Ø↑	max 750 N/mm ² Ø↑
626958	160	1,6	2,0
626959	180	1,8	2,5

* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

사용법 (사진)



The carabiner on the lanyard is attached to the ring on the tool. The rings on the tools are large enough to accept 2 carabiners.



The carabiner on the lanyard has to be protected against opening using a lock ring.



Before removing the tool from the belt, unscrew the lock ring on the carabiner on the belt.



Open the carabiner on the belt and remove the tool, which is attached to a lanyard, from the carabiner on the belt. The tool is now ready for use.



Correct attachment of the tool to the lanyard. Return the tool to the belt following the steps in reverse order.



Using the socket remover (Article 1111) depress the pin in the hole while removing the socket from the square drive of the ratchet and then switch the socket or extension.

안전 수칙



- 플라이어는 정기적으로 기름칠을 해야 합니다. 경첩에 오일 한 방울이 있으면 공구 수명이 연장되고 쉽게 작동됩니다.
- 플라이어로 와이어를 절단할때, 보호 안경 및 고글을 착용하십시오.
- 편의를 위해 손잡이가 제공됩니다. 감전으로부터 사용자를 보호하기 위한 것이 아니며 전기가 흐르는 전기 회로에서 사용해서는 안 됩니다.



- 해당 용도로 특별히 제조된 경우가 아니면 플라이어를 사용하여 경화된 와이어를 절단하지 마십시오.
- 플라이어를 과도한 열에 노출시키지 마십시오. 톨이 손상될 수 있습니다.
- 플라이어를 망치로 사용하지 마십시오.
- 손잡이를 망치 용도로 사용하지 마십시오. 금이 가거나 깨질 수 있습니다.
- 더 큰 지렛대를 확보하기 위해 플라이어 핸들 길이를 늘리지 마십시오.
- 너트나 볼트에 플라이어를 사용하지 마십시오. 렌치가 더 효율적이며 조임장치가 손상될 위험이 적습니다.

안전 (사진)



자주 묻는 질문

고소 작업용 공구를 일반 공구로 사용할 수 있습니까?

고소 작업을 위한 공구는 탈부착이 불가능한 리벳이 달린 금속 버클이 추가된 것을 제외하고는 일반 도구와 동일한 기능을 가지고 있습니다.

높은 곳에서 안전한 작업을 위한 도구당 명시된 중량에는 금속 링의 중량도 포함됩니까?

공구에 표시된 공구의 무게, 금속 링의 무게도 포함됩니다.