

Telefoontang met snijkanten, vertand, gebogen, voor veilig werken op hoogte

512/1BI-H



Profielen



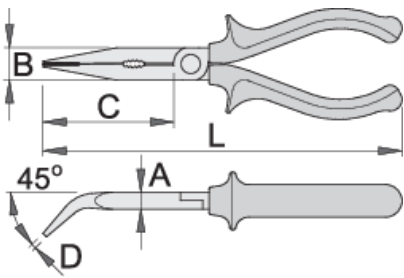
Product attributen



- materiaal: premium plus carbonstaal
- drop forged, entirely hardened and tempered
- snijkanten inductief gehard
- kop gepolijst
- surface finish: trivalent chrome plated according to ISO 1456:2009
- dubbel-component handvaten voor zeer intensief gebruik
- made according to standard ISO 5745

Voordelen:


- In order to ensure the highest level of safety, the riveted metal ring is not mounted only through the plastic handles but is attached through the metal part of the tool handle.
- non-removable riveted metal ring
- tool weight is marked on each tool
- the rings on the tools are large enough to accept 2 carabiners
- Unior's tools for working at heights have been designed to preserve the tools' basic functions, ergonomics and utility, or to reduce them to the smallest possible extent.

- jaws bent to an angle of 45°
- de lange bekken maken het mogelijk eenvoudige en precieze moeren en schroeven samen te klemmen
- sterke bekken geven een goede grip



	L	A	B	C	D	
626962	170	9	17	61	2,5	156
626192	200	9	17	77	2,5	205

knipcapaciteit (10N=1kg)

	L	max 1560 N/mm² Ø↑	max 750 N/mm² Ø↑
626962	170	1,6	2,0
626192	200	1,8	2,5

* Afbeeldingen van producten zijn symbolisch. Alle afmetingen zijn in mm en gewicht in gram. Alle vermelde afmetingen kunnen variëren in tolerantie.

Gebruik (Afbeeldingen)



The carabiner on the lanyard is attached to the ring on the tool. The rings on the tools are large enough to accept 2 carabiners.



The carabiner on the lanyard has to be protected against opening using a lock ring.



Before removing the tool from the belt, unscrew the lock ring on the carabiner on the belt.



Open the carabiner on the belt and remove the tool, which is attached to a lanyard, from the carabiner on the belt. The tool is now ready for use.



Correct attachment of the tool to the lanyard. Return the tool to the belt following the steps in reverse order.



Using the socket remover (Article 1111) depress the pin in the hole while removing the socket from the square drive of the ratchet and then switch the socket or extension.

Veiligheidstips



- Always change tools in secure areas where there is no risk of falling tools.
- Always use tools with Unior carabiners and never use carabiners with a diameter less than 6mm.
- Tools being used at height should regularly be checked for damage and that there is no damage to lanyards, carabiners, attachment rings or belts.



- Don't use tools without attaching them to your work belt when working at height.
- Don't use and fix damaged tools.
- Don't exceed maximum weight of 2.3kg for individual tools that a worker can attach to their belt.

Veiligheid (Afbeeldingen)



Veelgestelde vragen

Can we use a tool for working at height as a normal tool?

A tool for working at height has the same usability as a normal tool, except that a non-removable riveted metal buckle is added to this tool.

Does the stated weight per tool for safe work at height also include the weight of the metal ring?

The weight of the tool marked on the tool, included also weight of metal ring